AR-004-303

DEPARTMENT OF DEFENCE

DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION

ELECTRONICS RESEARCH LABORATORY

TECHNICAL MEMORANDUM

ERL-0358-TM

LAND NAVIGATION IN THE KIMBERLEYS UTILISING DIFFERENTIAL OMEGA

R.S. Edgar and J.H. Silby

S U M M A R Y

Field trials were carried out in July/August 1985 to test
the efficacy of Differential Omega for land navigation in
the East and West Kimberley regions of Western Australia.
To this end a base station was set up in Broome and
movements undertaken between a local survey mark and
similar marks at ranges of up to 700 km. This Technical
Memorandum describes the nature of the exercise and
discusses the results obtained.

TABLE OF CONTENTS

LIST OF FIGURES

20. Diurnal phase plot, Omega Reunion, 13.6 kHz

21. Diurnal phase plot, Omega Reunion, 11-1/3 kHz

22. Diurnal phase plot, Omega Australia, 13.6 kHz

23. Diurnal phase plot, Omega Australia, 11-1/3 kHz

Figures 24 to 59 represent daylight differential phase variations

between the field site and base

24. Sandfire Flat, Japan, 13.6 kHz

25. Sandfire Flat, Reunion, 13.6 kHz

26. Sandfire Flat, Australia, 13.6 kHz

27. Sandfire Flat, Japan, 11-1/3 kHz

28. Sandfire Flat, Reunion, 11-1/3 kHz

29. Sandfire Flat, Australia, 11-1/3 kHz

30. Pt Hedland, Japan, 13.6 kHz

31. Pt Hedland, Reunion, 13.6 kHz

32. Pt Hedland, Australia, 13.6 kHz

33. Pt Hedland, Japan, 11-1/3 kHz

34. Pt Hedland, Reunion, 11-1/3 kHz

35. Pt Hedland, Australia, 11-1/3 kHz

36. Fitzroy Crossing, Japan, 13.6 kHz

37. Fitzroy Crossing, Reunion, 13.6 kHz

38. Fitzroy Crossing, Australia, 13.6 kHz

39. Fitzroy Crossing, Japan, 11-1/3 kHz

40. Fitzroy Crossing, Reunion, 11-1/3 kHz

41. Fitzroy Crossing, Australia, 11-1/3 kHz

42. Halls Creek, Japan, 13.6 kHz

43. Halls Creek, Reunion, 13.6 kHz

44. Halls Creek, Australia, 13.6 kHz

45. Halls Creek, Japan, 11-1/3 kHz

46. Halls Creek, Reunion, 11-1/3 kHz

47. Halls Creek, Australia, 11-1/3 kHz

48. Dingo Springs, Japan, 13.6 kHz

49. Dingo Springs, Reunion, 13.6 kHz

50. Dingo Springs, Australia, 13.6 kHz

51. Dingo Springs, Japan, 11-1/3 kHz

52. Dingo Springs, Reunion, 11-1/3 kHz

53. Dingo Springs, Australia, 11-1/3 kHz

54. Derby, Japan, 13.6 kHz

55. Derby, Reunion, 13.6 kHz

56. Derby, Australia, 13.6 kHz

57. Derby, Japan, 11-1/3 kHz

58. Derby, Reunion, 11-1/3 kHz

59. Derby, Australia, 11-1/3 kHz

Figures 60 to 71 represent 24 hour differential phase variations

between the field site and base

60. Sandfire Flat, Japan, 13.6 kHz

61. Sandfire Flat, Reunion, 13.6 kHz

62. Sandfire Flat, Australia, 13.6 kHz

63. Sandfire Flat, Japan, 11-1/3 kHz

64. Sandfire Flat, Reunion, 11-1/3 kHz

65. Sandfire Flat, Australia, 11-1/3 kHz

66. Dingo Springs, Japan, 13.6 kHz

67. Dingo Springs, Reunion, 13.6 kHz

68. Dingo Springs, Australia, 13.6 kHz

69. Dingo Springs, Japan, 11-1/3 kHz

70. Dingo Springs, Reunion, 11-1/3 kHz

71. Dingo Springs, Australia, 11-1/3 kHz

1. INTRODUCTION

In 1980 a Differential Omega field trial was carried out in the Pilbara region of Western Australia(ref.1). At that time the Australian Omega transmitter had not been commissioned and circumstances required that a range/range navigational technique be adopted, based upon observation of transmissions from Omega Japan and Omega Reunion. The relevant clock error was calculated by linear interpolation between mobile and base clock readings at the start and end of each sortie.

The commissioning of Omega Australia in August 1982 rendered hyperbolic (or range/range/range) navigation feasible, and this approach was adopted during sea trials carried out off the south coast of WA in 1983(ref.2). Subsequently, a suggestion that a further trial be carried out in the north-west of WA, utilising the currently available hyperbolic or range/range/range option, gained the support of DCDS, and was incorporated in Task DST 84/077.

After due consideration of the logistical requirements of such an exercise it was decided that the base station should be set up in Broome and that movements should take place as far south as Port Hedland and as far north as Lake Argyle. An approach to the Overseas Telecommunications Commission (Aust) resulted in the generous offer of base station accommodation within the local OTC coastal radio station complex (Broomeradio).

A reconnaissance was carried out in Broome in May 1985 with the primary objective of determining the optimum siting, within the precincts of Broomeradio, of the Omega receiving antenna, with a view to avoidance of interference both from power mains and OTC transmissions, and for the purpose of choosing an appropriate datum point from which movements could proceed. The coordinates of the datum point were subsequently determined by the Perth branch of the Australian Survey Office, which was also responsible for the establishment of additional marks, as required, at intermediate points of the movements.

The ERL trials team, comprising R.S. Edgar, J.H. Silby and A.R. Padgham, together with trials vehicles, were transported by an RAAF Hercules aircraft from Edinburgh to Broome on 17 July 1985; the trial proper began on 22 July and ended on 30 August.

Each of two sorties was undertaken twice:

   Broome/Sandfire Flat/Pt Hedland/Sandfire Flat/Broome

and

   Broome/Fitzroy Crossing/Halls Creek/Dingo Springs/Halls Creek
   /Fitzroy Crossing/Derby/Broome

The routes followed are shown in figure 1. Sandfire Flat lies halfway between Broome and Port Hedland, while Dingo Springs is located 30 km south east of Kununurra.

2. NATURE OF TRIAL

The 1980 land navigation trial in NW Australia involved movements between numerous sites of known coordinates. At each site navigational readings were averaged over a period of 16 min prior to movement to the next site. Post-trial considerations led to the conclusion that averaging time should be reduced in subsequent trials to values more likely to obtain in normal practice, and that recording should be carried out at any given site over a

considerable period to permit of a better appreciation of the manner in which correlation between base and mobile positions varied with time. This approach was adopted in the present trial where averaging time was reduced to about 5 min and where hand readings were taken throughout normal daylight working hours at each site. The number of sites visited was correspondingly reduced.

The range/range/range method of operation has been described elsewhere(ref.2) and need only be summarised here. The apparent changes of radial range from three Omega transmitters (Japan, Reunion, Australia) which result from the movement are computed from the observed differential phase increments of incoming signals relative to oscillators (clocks) maintained at base and in the navigation vehicle. In the absence of relative clock drift and with correct choice of signal phase velocity the circular lines of position (LOPs) computed for the mobile intersect at a point corresponding to its true position. In the presence of clock error alone the lines of position, corresponding to the three signals observed, form an error triangle whose in-centre may be shown to be the true position. The clock error may be calculated from the distance of the in-centre from any side. In these circumstances the result is that which would have obtained had a hyperbolic approach been adopted and the computations been carried out on the basis of measured variations of phase difference between incoming signals taken in pairs.

The situation becomes more complicated in the presence of LOP errors due either to ionospheric decorrelation of diurnal phase shift between base and mobile units or an incorrect choice of phase velocity in the computations. In these circumstances an error triangle obtains in the absence of clock error. While we continue to take its in-centre as the nominal position of the mobile, since this eliminates any superimposed clock error, we cannot relate the distance of the in-centre from the true lines of position to the individual LOP errors. Of course, if the clock error can be calculated, the observed lines of position can be modified accordingly and individual LOP errors computed. This situation prevailed in the earlier sea trial(ref.2) where clock error was calculated from the mean rate of growth of the error triangle over a period of days while the ship remained at anchor, it being assumed that diurnal differential variations would not contain a secular component. This technique could not be utilised in the present instance because of limited stop-over time in each position and because of suspicions concerning the stability of the mobile frequency standard when subject to long-term mechanical vibration. Thus, although clock error is automatically eliminated when the in-centre of the error triangle is taken to represent the mobile position, the accompanying ionospheric errors are neither eliminated nor uniquely resolvable. In consequence there is no unequivocal procedure available for retrospective error reduction by modification of individual phase velocities.

3. ANALYSIS OF RESULTS

The trial was carried out utilising two independent Omega frequencies, viz 11-1/3 kHz and 13.6 kHz. In order to make use of real-time computing facilities it was necessary at the outset to choose working values of phase velocity appropriate to propagation on each frequency. The values chosen were:-

$$11\text{-}1/3 \text{ kHz} \quad v = 1.0021c$$
$$13.6 \text{ kHz} \quad v = 1.0003c$$

based on a sea water path during daylight hours(ref.3). It was appreciated that these figures would require subsequent modification for land propagation but it was not considered likely that any major problem would arise from

anomalous propagation. In the event, polar error plots printed out post-trial exhibited site errors typically of the order of a few hundred metres, and thereby confirmed the efficacy of Differential Omega in the Kimberley region when utilising transmissions from Omega Japan, Reunion and Australia. Unfortunately, absolute error data for Dingo Springs are unavailable; during each sortie, equipment malfunction led to the loss of continuity of incremental phase integration.

In looking for an immediate explanation of residual errors we note that propagation between the Omega transmitters and (a) base station (b) field sites may involve land, sea or mixed paths. Only in the case of Omega Australia are the paths wholly over land.

At the risk of an overly simplistic treatment we will assume that the equiphase fronts of transmissions from Japan and Reunion are normal to the great circle bearings on approach to the Australian mainland, and that discrete phase velocities apply to the land and sea path components as measured on a map. Thus for transmission from Japan it is easily shown that the associated LOP at Fitzroy Crossing, based upon measurement of incremental phase and the initially-assumed value of phase velocity, will be displaced too far south by:-

$$(d_3 - d_2) \left[\frac{v'}{v_1} - 1 \right] - d_1 \left[\frac{v'}{v_s} - 1 \right]$$

where d_1 = length of great circle sea path between Broome and the latitude at which the great circle path to Fitzroy Crossing crosses the coast line

d_2 = length of land path to Broome from above position

d_3 = length of land path to Fitzroy Crossing from above position

v' = assumed phase velocity over sea

v_s = true phase velocity over sea

v_1 = true phase velocity over land

In particular, if $v_s = v'$ then for the case under consideration

$$error = 3 \times 10^5 \left(\frac{1.0003c}{v_1} - 1 \right) \text{ m at 13.6 kHz}$$

It will be seen from figure 3, reference 3 that phase velocity over land is a function of conductivity and that an appropriate figure in the present instance would be 1 part in 10^3 less than sea velocity, corresponding to $\sigma = 10^{-3}$ mhos/m. The LOP error therefore becomes 300 m. On applying the above phase velocity correction to the difference in radial distance between Omega Australia and Broome and Fitzroy Crossing in turn we find that the Australian LOP must be moved away from Omega Australia by 250 m.

Finally, we find that if we assume that the true sea velocity is 1.0003c at 13.6 kHz then the Reunion LOP at Fitzroy Crossing will be too far from Reunion by $d \left(\frac{v'}{v_1} - 1 \right)$ where d is the land path to Fitzroy Crossing (about 460 km) whence we would expect a corresponding error of 460 m.

Figure 2 shows the original error plot for Fitzroy Crossing on 13.6 kHz based on v/c = 1.0003. When we apply the above modifications to the individual LOPs and recompute the in-centre of the error triangle we find that the mean error in the original plot is largely eliminated (figure 3) provided that we apply only about 20% of the suggested correction for Reunion.

Figure 4 shows the uncorrected error plot for Fitzroy Crossing on 11-1/3 kHz and figure 5 the corrected plot based on a land velocity factor of 1 part in 10^3 less than the assumed sea velocity and applied to each transmission in turn. Figures 6 to 13 represent error plots for the other field sites when identical correction factors are employed. Of all the modified plots only Derby on 13.6 kHz and Pt Hedland on 11-1/3 kHz exhibit particularly poor results. The adjusted figures are displayed in the form of error histograms in figures 14 to 17.

The scatter observed in the polar plots, being directly related to the perturbations obtaining in the differential radial ranges to the three Omega transmitters, is a function of the degree of ionospheric decorrelation between the base and field sites. Figures 18 to 59 relate to this aspect of the investigation. These figures have been plotted automatically from phase data recorded continuously on floppy disc at the base and field sites, unlike the polar error plots which were derived from discrete observations of real-time displays.

Figures 18 to 23 comprise typical diurnal phase plots, as recorded at Broome, for the three Omega transmissions of 13.6 kHz and 11-1/3 kHz. It will be observed that these plots exhibit angular closure discrepancies of about 40° over a 24 hour period. This is due to an error in the base station frequency standard of about 1 part in 10^{10}. The effect on navigational accuracy is, of course, negligible since it is only the relative drift rate between base and mobile oscillators which is significant (and then only for range/range working).

The corresponding differential plots for the various sites are shown in figures 24 to 59 for daylight hours. In interpreting these plots it should be borne in mind that identical phase variations on each transmission at a given frequency does not give rise to a positional shift; we are consequently concerned with three-station rather than individual trends. Indeed, individual plots as displayed may have suffered skewing as a result of drift between base and mobile clocks.

A second set of plots, not reproduced here, has been derived from data gathered during the repeat movement between Broome and the out stations. While there is general agreement between corresponding plots, there are sufficient discrepancies in the fine structure (and, in one or two cases, in major trends) to lead to the conclusion that day to day differentials are not sufficiently reproduceable to warrant detailed study. (Note that the polar error plots include both sets of readings taken about a month apart.)

However it is clear that random phase variations of the order of a degree obtain throughout the day on individual phase records with periods of perhaps an hour or less, and that these are superimposed on diurnal variations which become excessive outside the interval 0900 to 1600 local. It consequently now becomes necessary to address the subject of night-time accuracy.

4.   IONOSPHERIC DECORRELATION AT NIGHT

Figures 60 to 71 are differential phase records for Broome/Sandfire Flat and Broome/Dingo Springs taken over 24 hour periods. These plots demonstrate the considerable degree of decorrelation which occurs at night. Thus in

figures 60 and 63 we find peak/peak phase excursions for Omega Japan of some 120° although daylight variation amounts to only a degree or so (figure 24). Decorrelation for both Reunion and Australia is considerably less than for Japan, amounting to 20° peak/peak or less on each frequency. The discontinuities on the Reunion and Australia curves corresponds to movement from the survey mark to motel accommodation and back; the effect is missing for Japan since the movement involved was almost exactly normal to the radius vector to that transmitter. There is an artifact of unknown origin at 0000 hours near the end of each trace. This has been sufficient to cause a cycle slip in the on-board computer when registering the phase of Australia on 11-1/3 kHz (figure 65).

The Dingo Springs differentials in figures 66 to 71 exhibit a considerably greater discontinuity due to vehicle movement at the end of the working day; in this case motel accommodation was located some 30 km from the survey mark in the direction of Reunion. It is evident that during the movement the radial distance from Omega Australia at first increased (phase retarded) and subsequently decreased by about the same amount.

Bearing in mind that 1° change of differential angle corresponds to a radial LOP movement of about 60 m at 13.6 kHz and 74 m at 11-1/3 kHz we find that the peak night positional error at Sandfire Flat could reach 3 km and rather less at Dingo Springs because of the reduced perturbation in Japan. It is evident that there is no simple relationship between night time decorrelation and distance between base and mobile at least over the range 250 to 670 km considered here.

5.   CONCLUSIONS

It has been demonstrated that Differential Omega provides effective daylight navigation in the Kimberley region of Western Australia when utilising transmissions from Omega Japan, Reunion and Australia. Of the measurements carried out on two occasions between the hours of 0830 and 1630 local on 13.6 kHz at Sandfire Flat, Pt Hedland, Fitzroy Crossing and Halls Creek (with the base station located at Broome), 89% fell within 250 m of the true position; this figure degraded to 81% when readings taken at Derby were included. Of the readings taken on 11-1/3 kHz at Sandfire Flat, Fitzroy Crossing, Halls Creek and Derby, 93% fell within 250 m; the figure degraded to 72% when Pt Hedland readings were included.

In the computations standard values were assumed for phase velocity over sea paths; for land paths values of 1 part in 10^3 lower were assumed, corresponding to earth conductivity of 10^{-3} mho/m except in the case of the Reunion transmission on 13.6 kHz where a better fit was obtained for a figure of 2 parts in 10^4.

Ionospheric decorrelation between base and field sites was found to be severe at night with degradation setting in during late afternoon. Positional errors of up to 3 km could be expected from this cause.

6.   ACKNOWLEDGEMENTS

REFERENCES

No.	Author	Title
1	Edgar, R.S.	"Land Navigation in North-West Australia Utilising Differential Omega". DSTO Technical Report ERL-0218-TR, October 1981
2	Silby, J.H.	"A Seaborne Navigation Trial Utilising a Differential Omega System". DSTO Technical Memorandum ERL-0295-TM, December 1983
3	Lynn, K.J.W.	"A Note on Phase Velocities for VLF Navigation". DSTO Technical Report ERL-0016-TR, June 1978
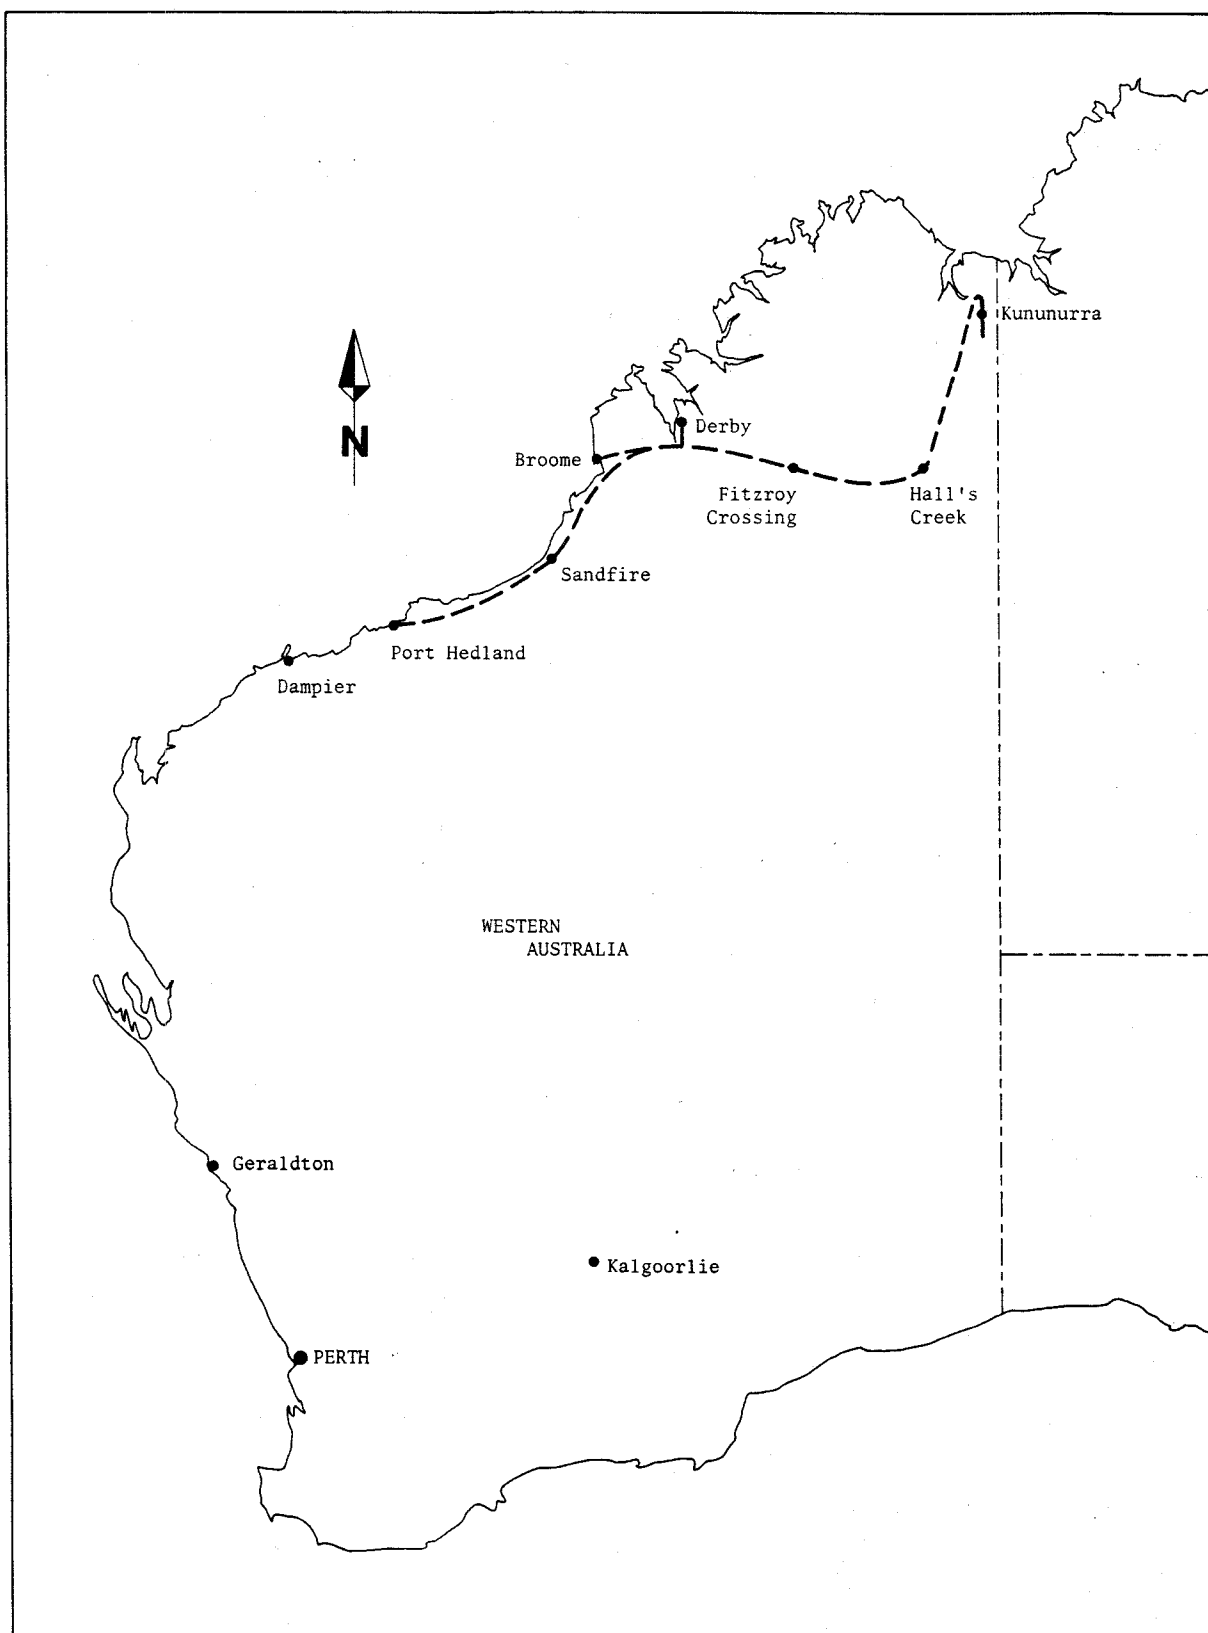
Figure 1. Map showing movements undertaken
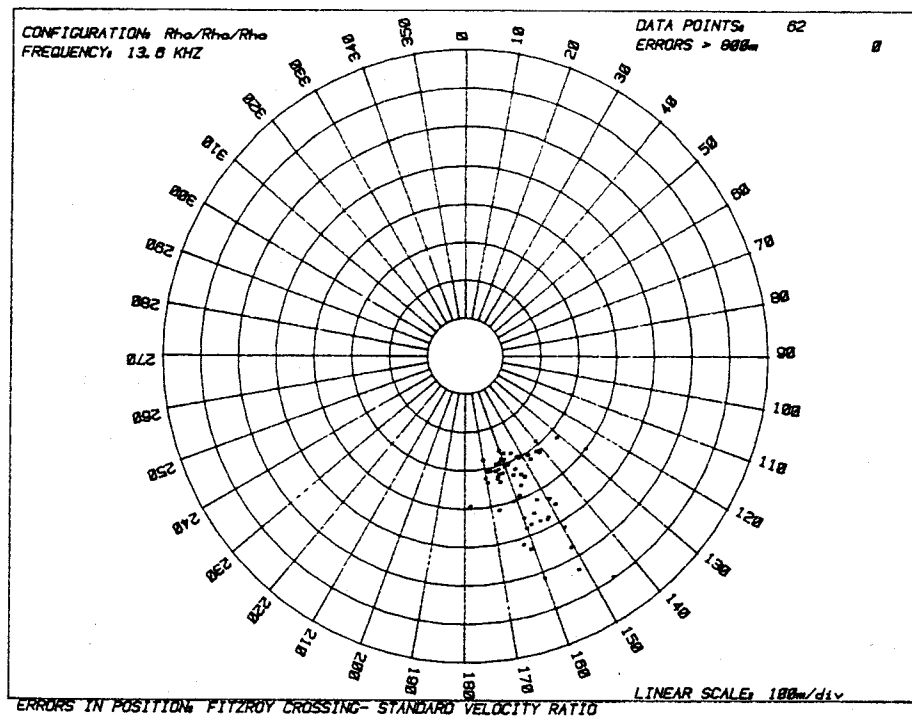
Figure 2. Unadjusted polar error plot, Fitzroy Crossing, 13.6 kHz
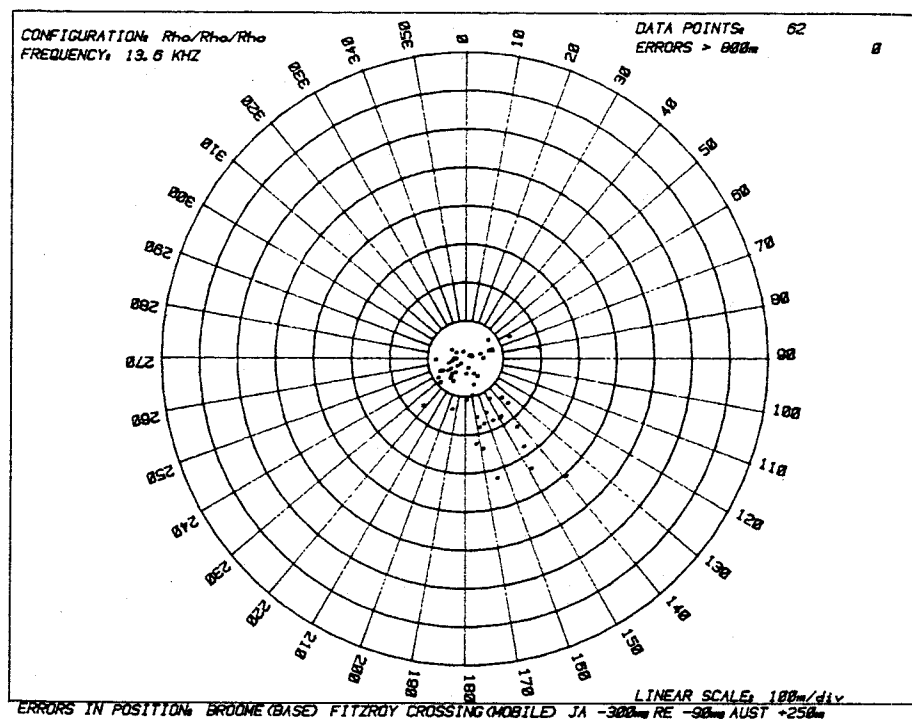
Figure 3. Adjusted polar error plot, Fitzroy Crossing, 13.6 kHz
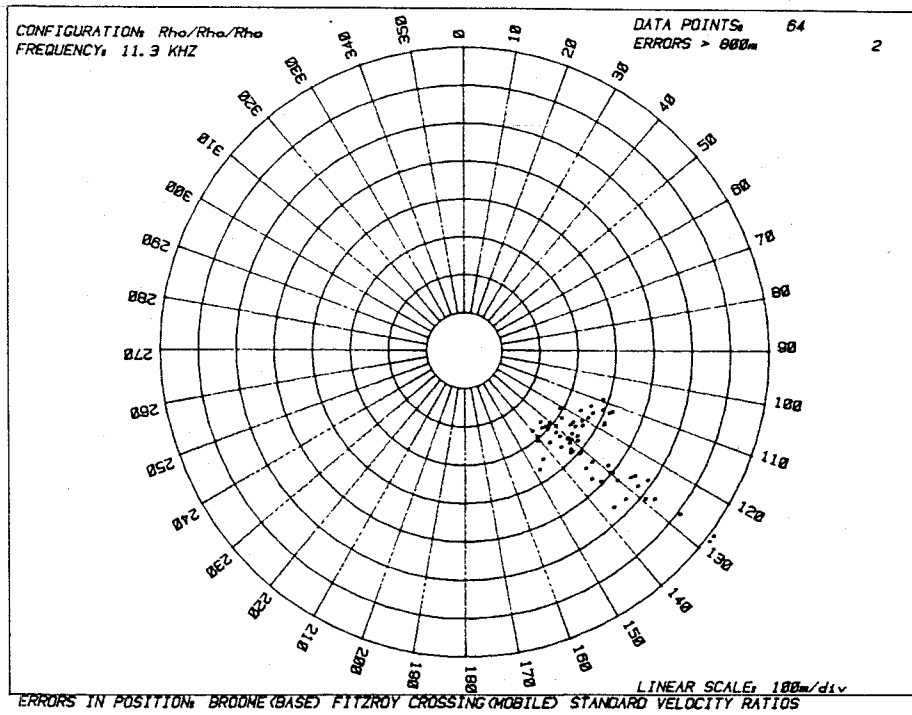
Figure 4. Unadjusted polar error plot, Fitzroy Crossing, 11-1/3 kHz
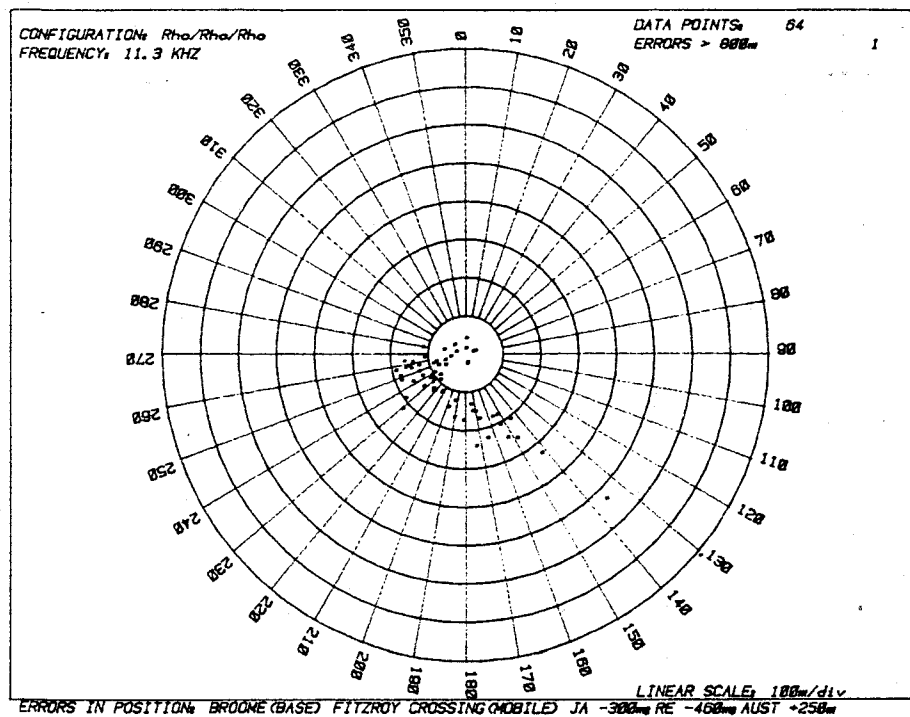
Figure 5. Adjusted polar error plot, Fitzroy Crossing, 11-1/3 kHz
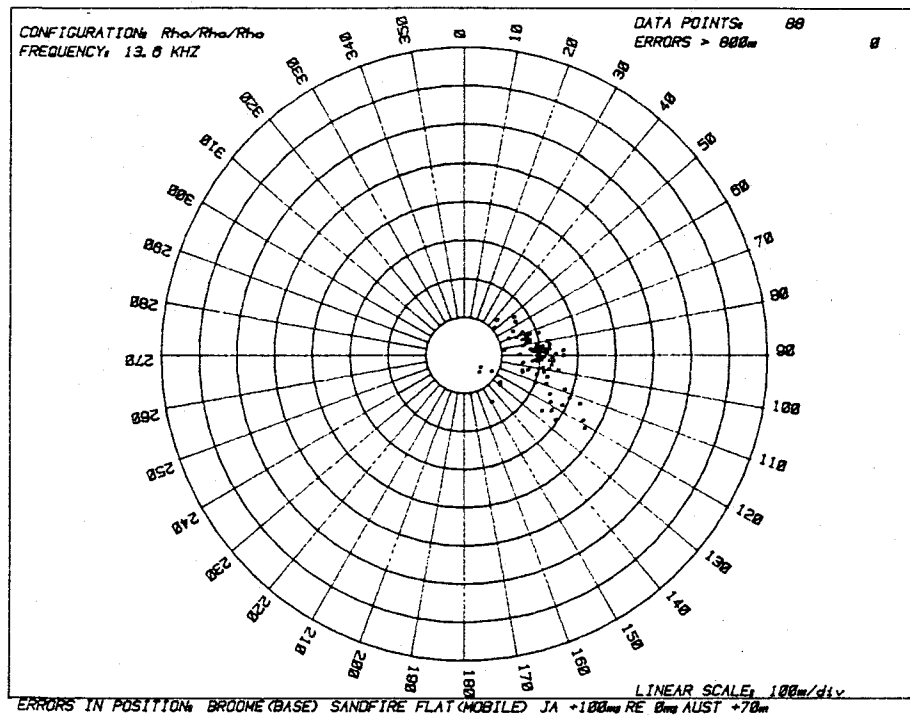
Figure 6. Adjusted polar error plot, Sandfire Flat, 13.6 kHz
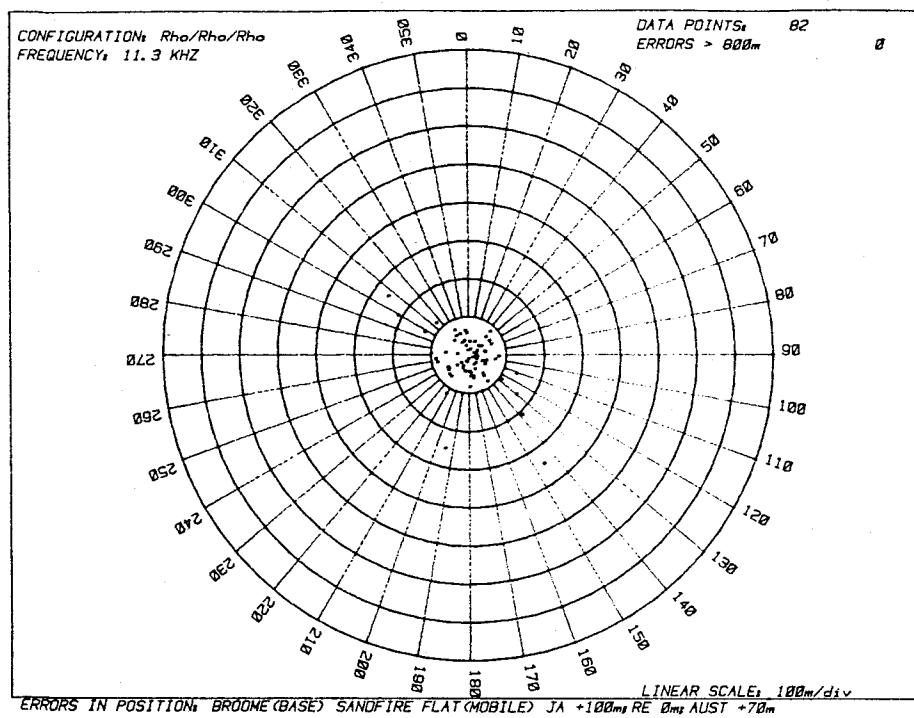
Figure 7. Adjusted polar error plot, Sandfire Flat, 11-1/3 kHz
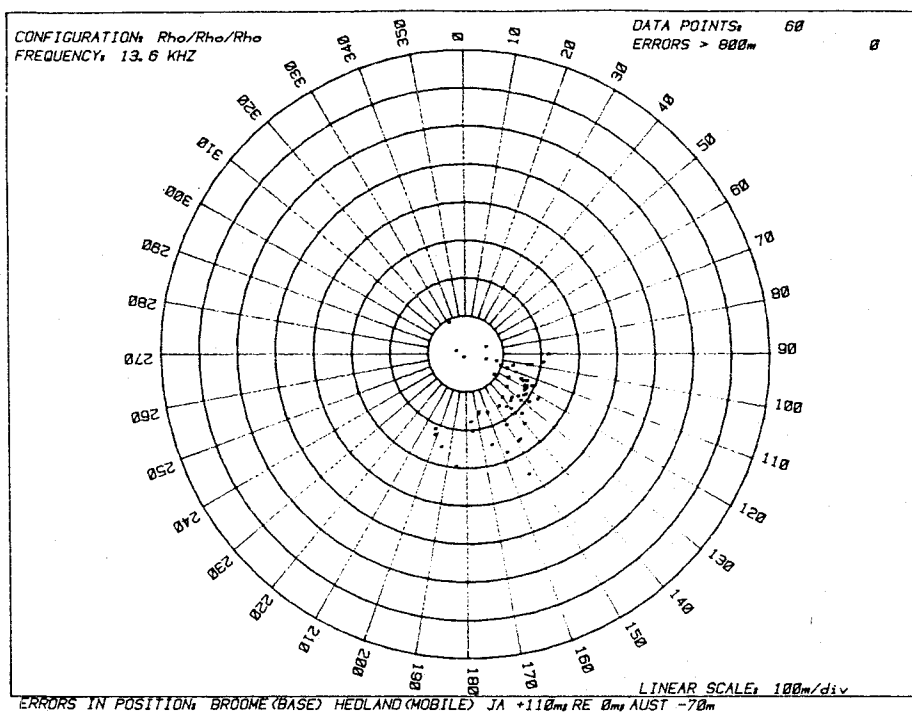
Figure 8.   Adjusted polar error plot, Pt Hedland, 13.6 kHz
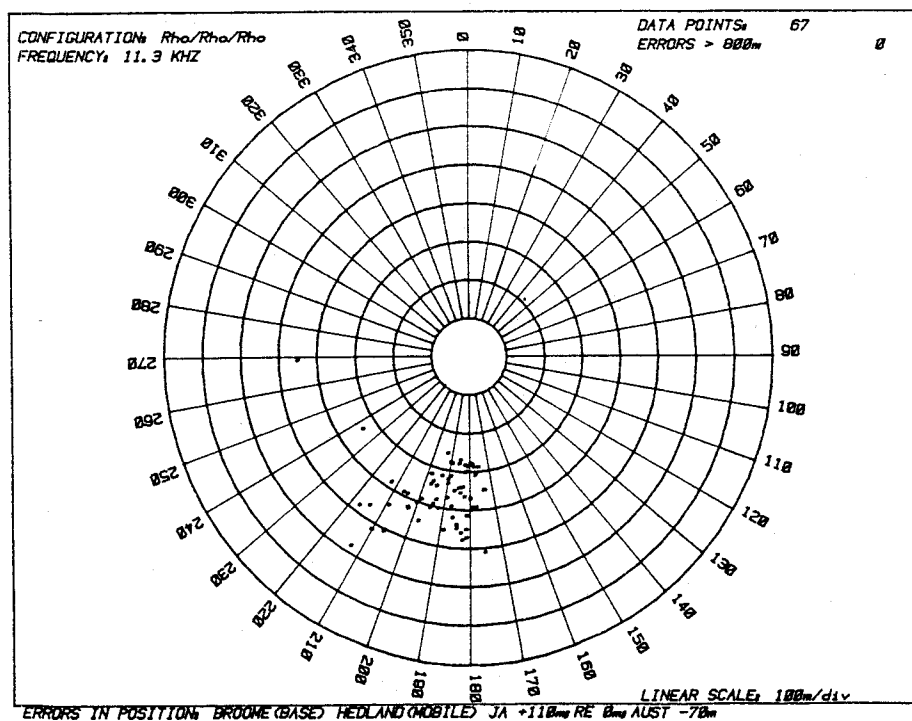
Figure 9.   Adjusted polar error plot, Pt Hedland, 11-1/3 kHz
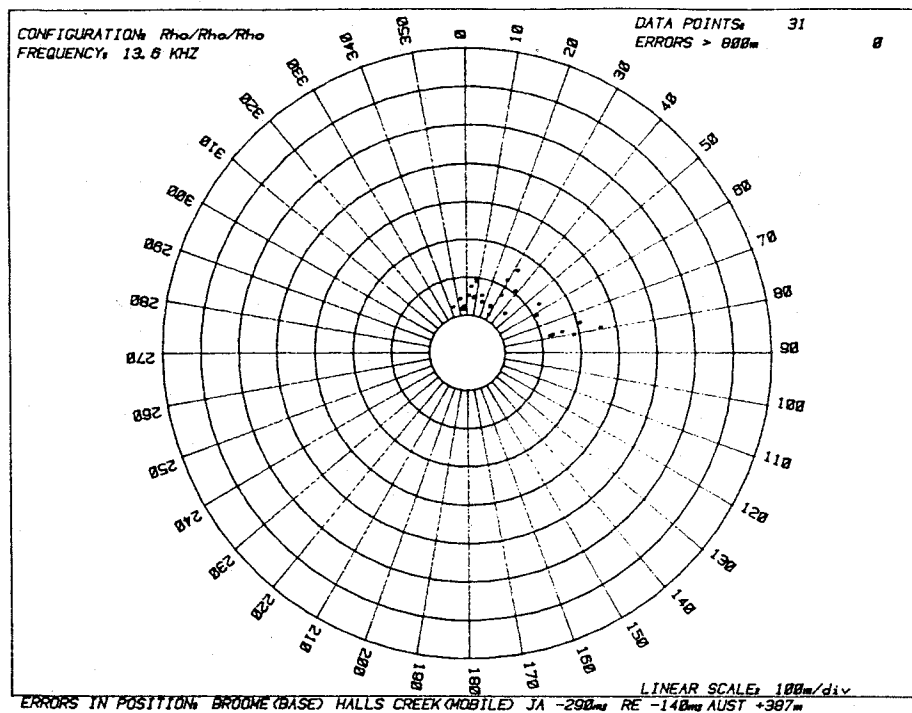
Figure 10. Adjusted polar error plot, Halls Creek, 13.6 kHz
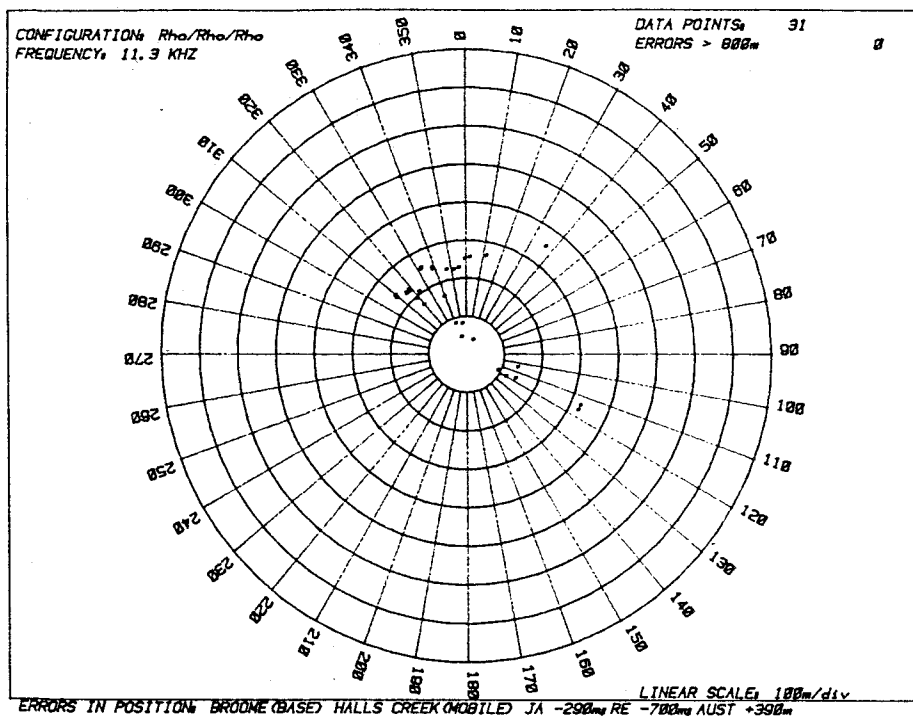
Figure 11. Adjusted polar error plot, Halls Creek, 11-1/3 kHz
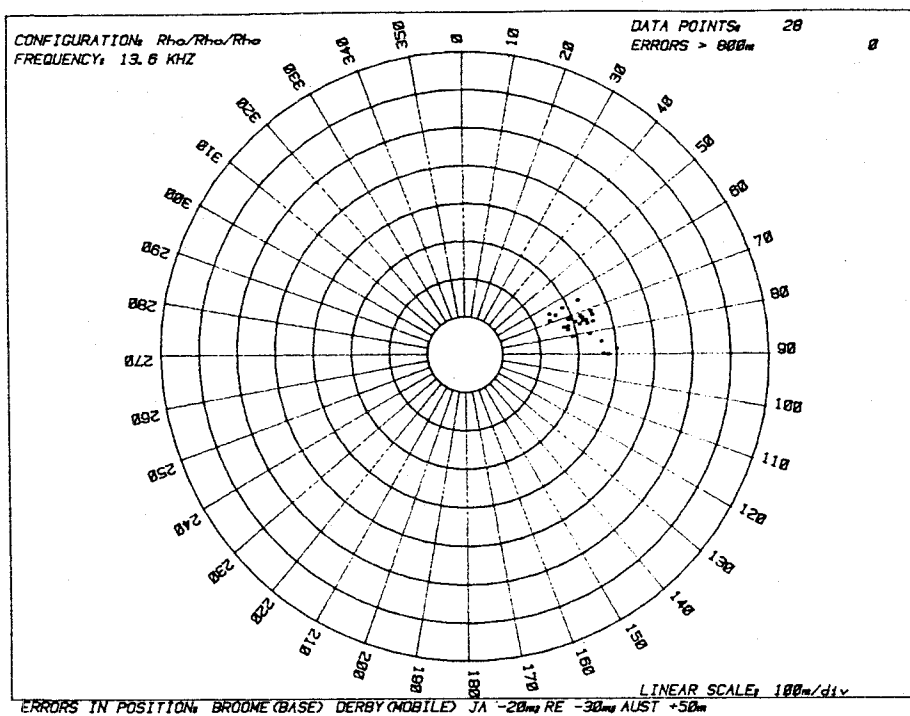
Figure 12. Adjusted polar error plot, Derby, 13.6 kHz
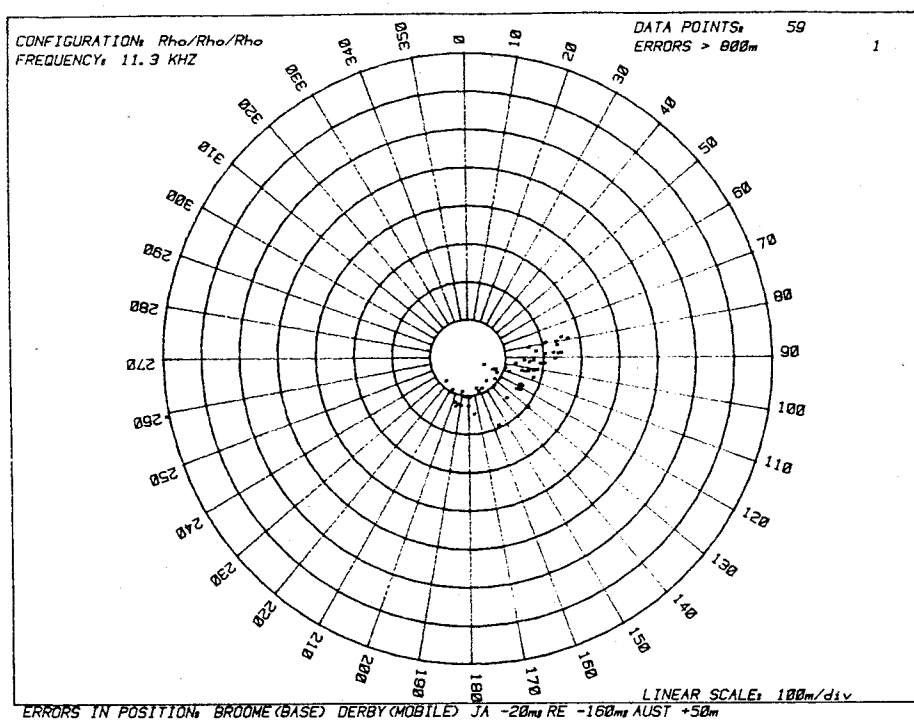
Figure 13. Adjusted polar error plot, Derby 11-1/3 kHz
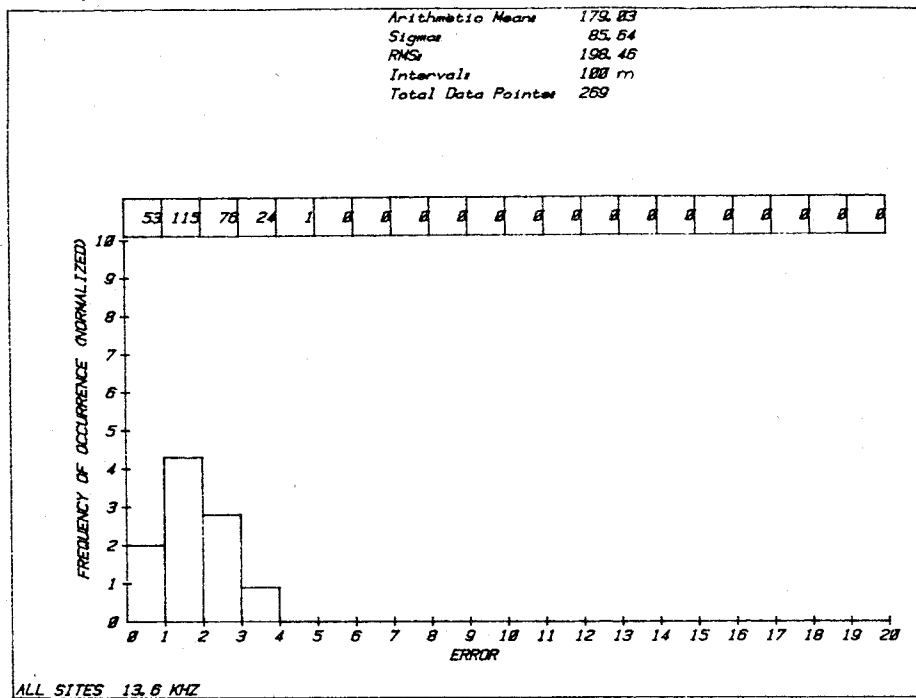
Figure 14. Error histogram, all sites, 13.6 kHz
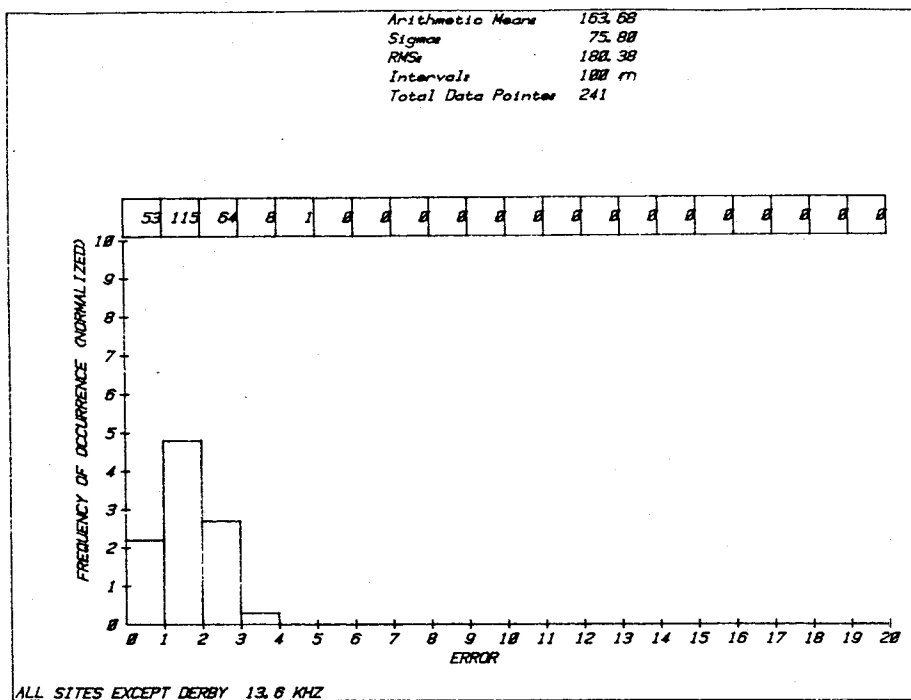
Figure 15. Error histogram, all sites except Derby, 13.6 kHz
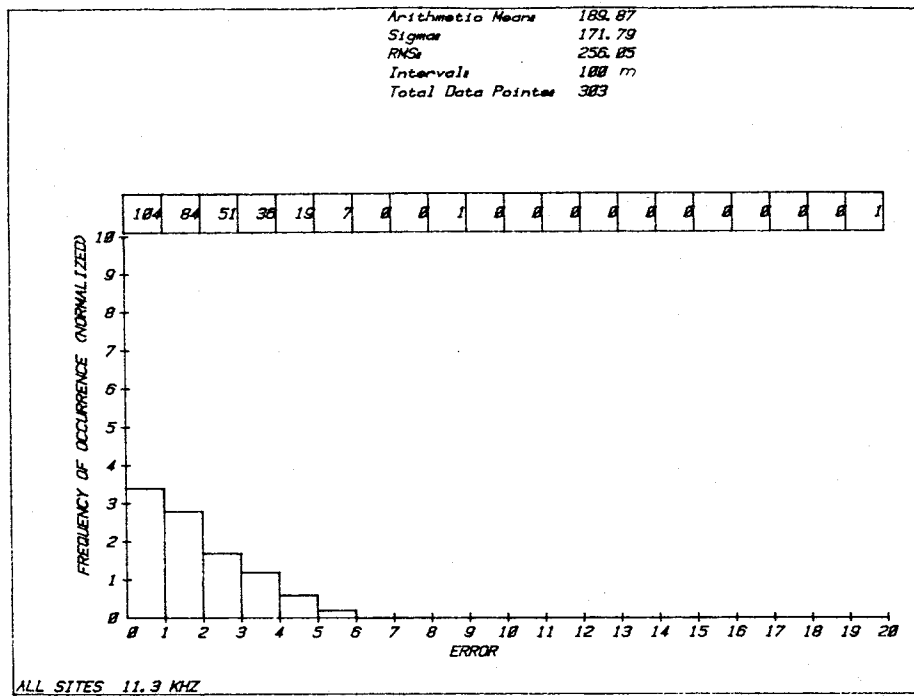
Figure 16. Error histogram, all sites, 11-1/3 kHz
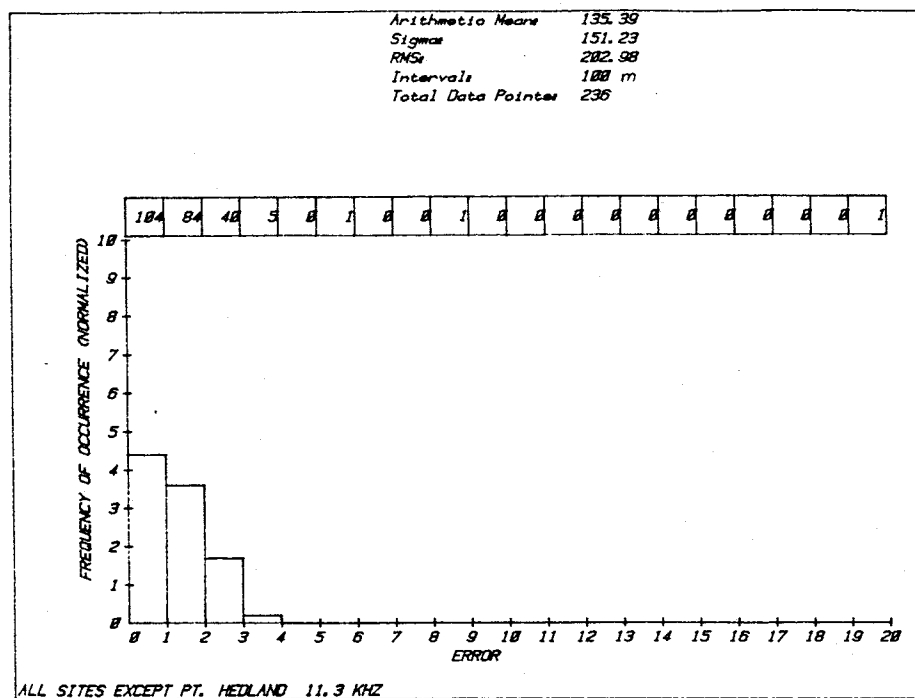
Figure 17. Error histogram, all sites except Pt Hedland, 11-1/3 kHz
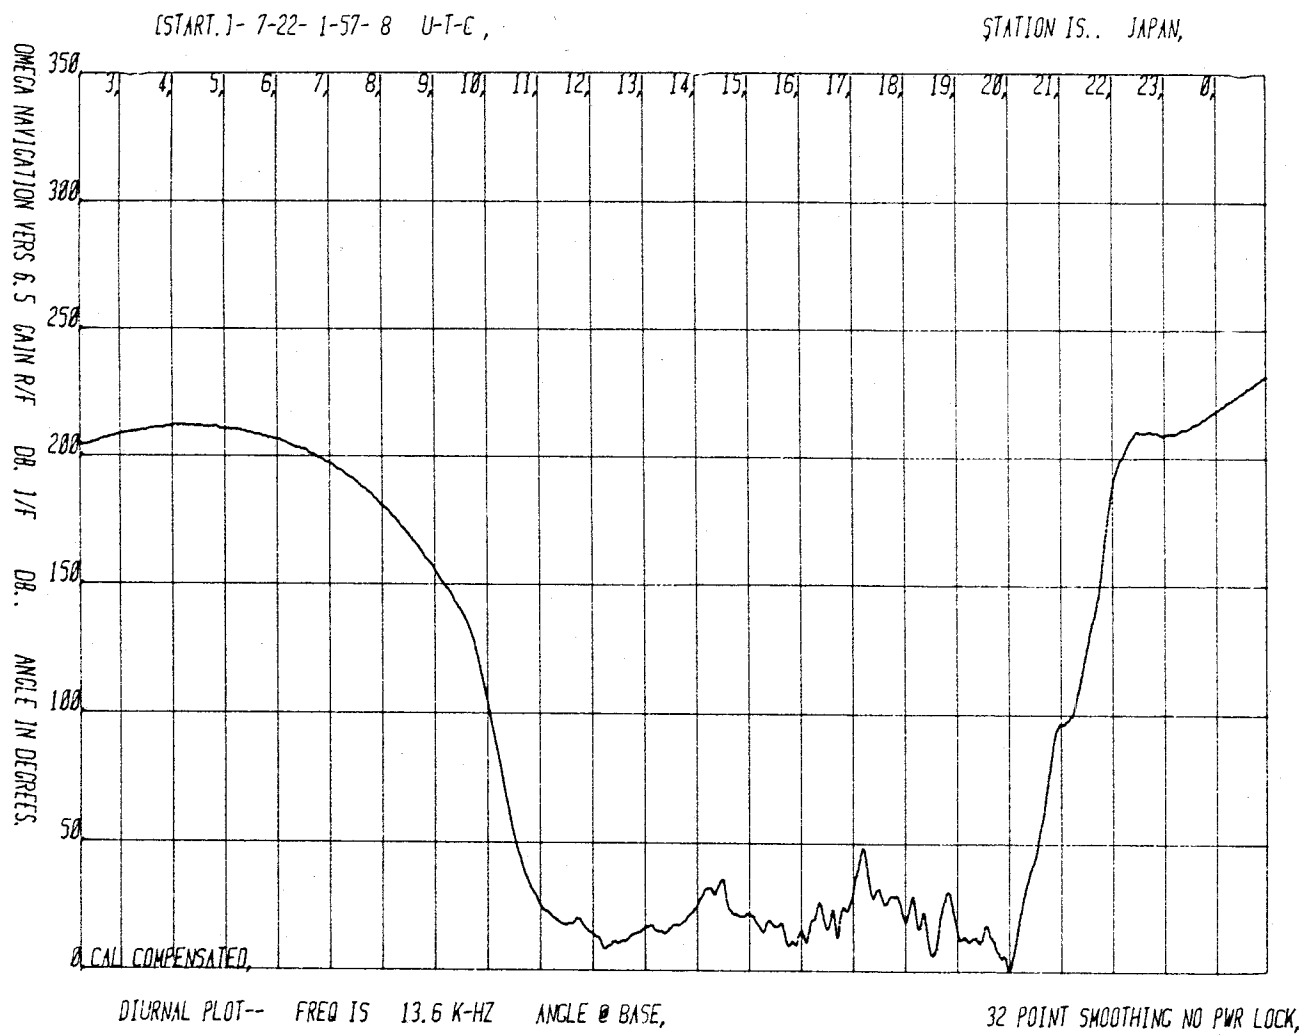
Figure 18. Diurnal phase plot, Omega Japan, 13.6 kHz
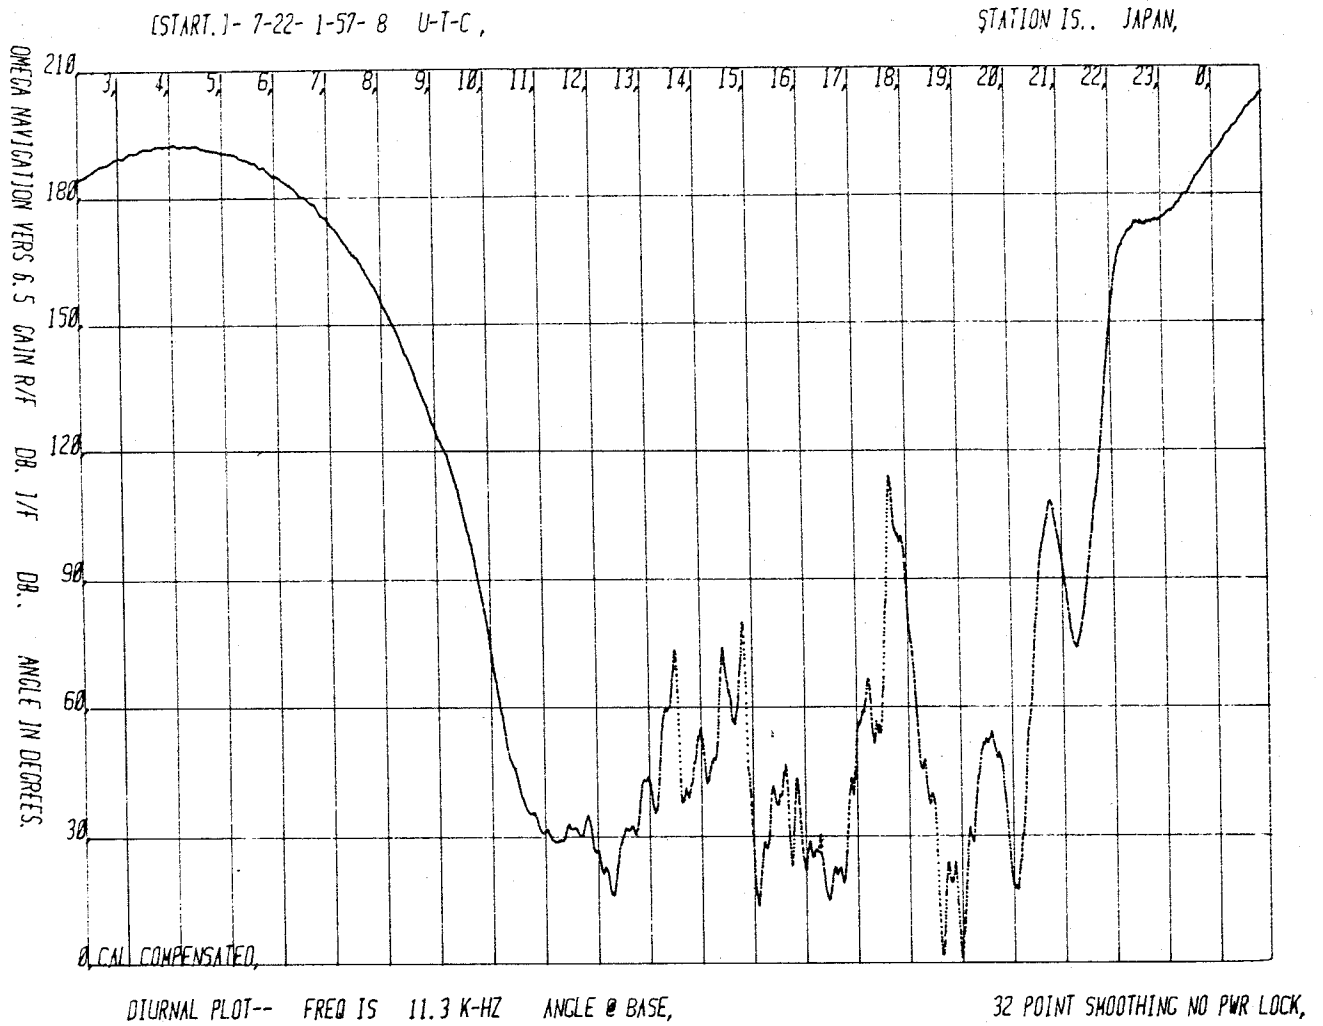
Figure 19. Diurnal phase plot, Omega Japan, 11-1/3 kHz
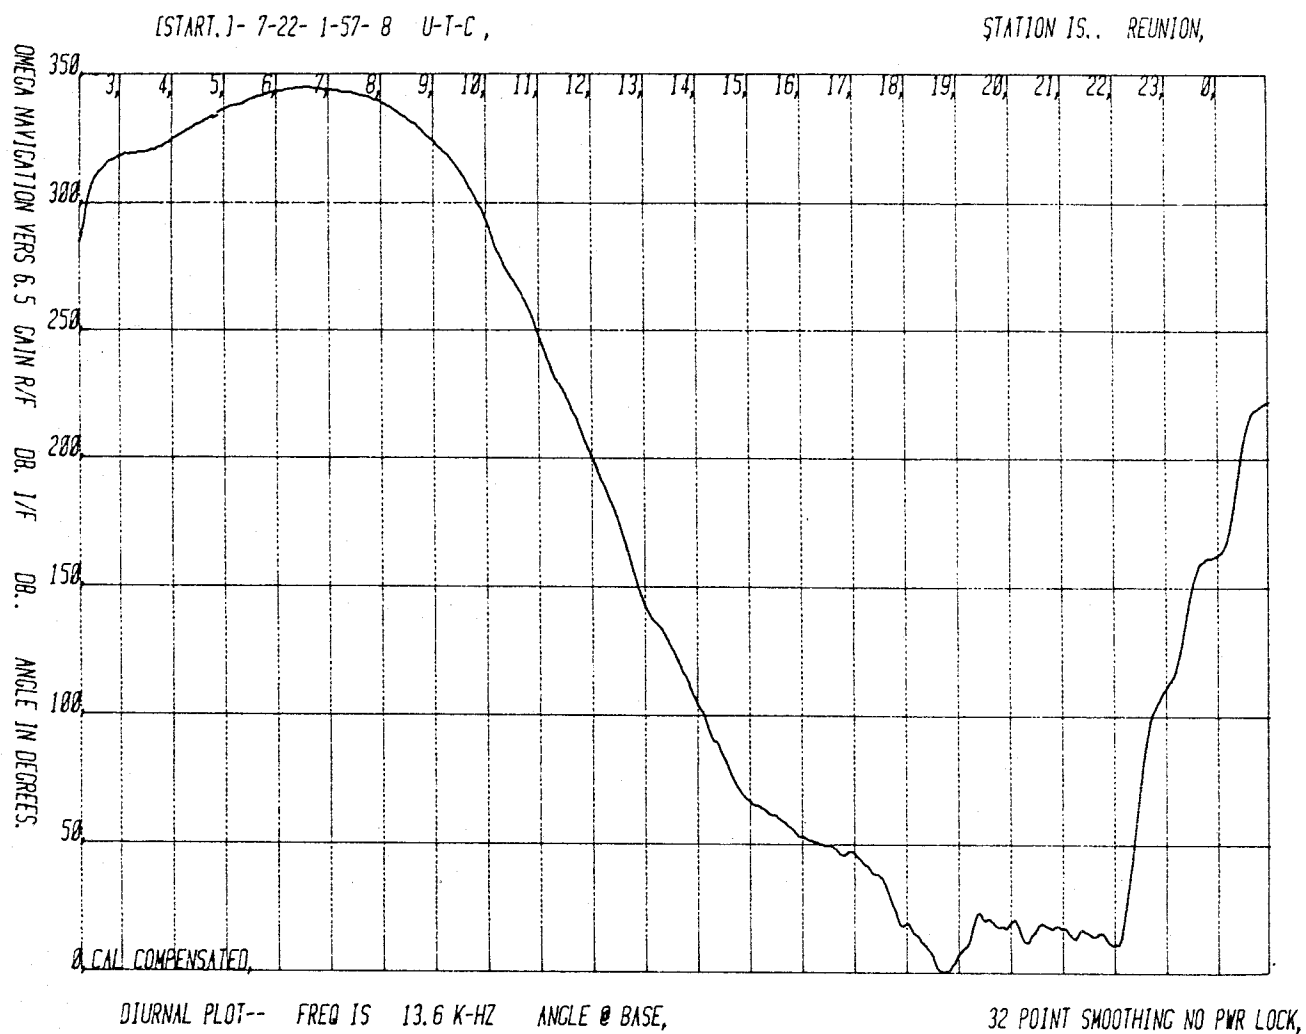
Figure 20. Diurnal phase plot, Omega Reunion, 13.6 kHz
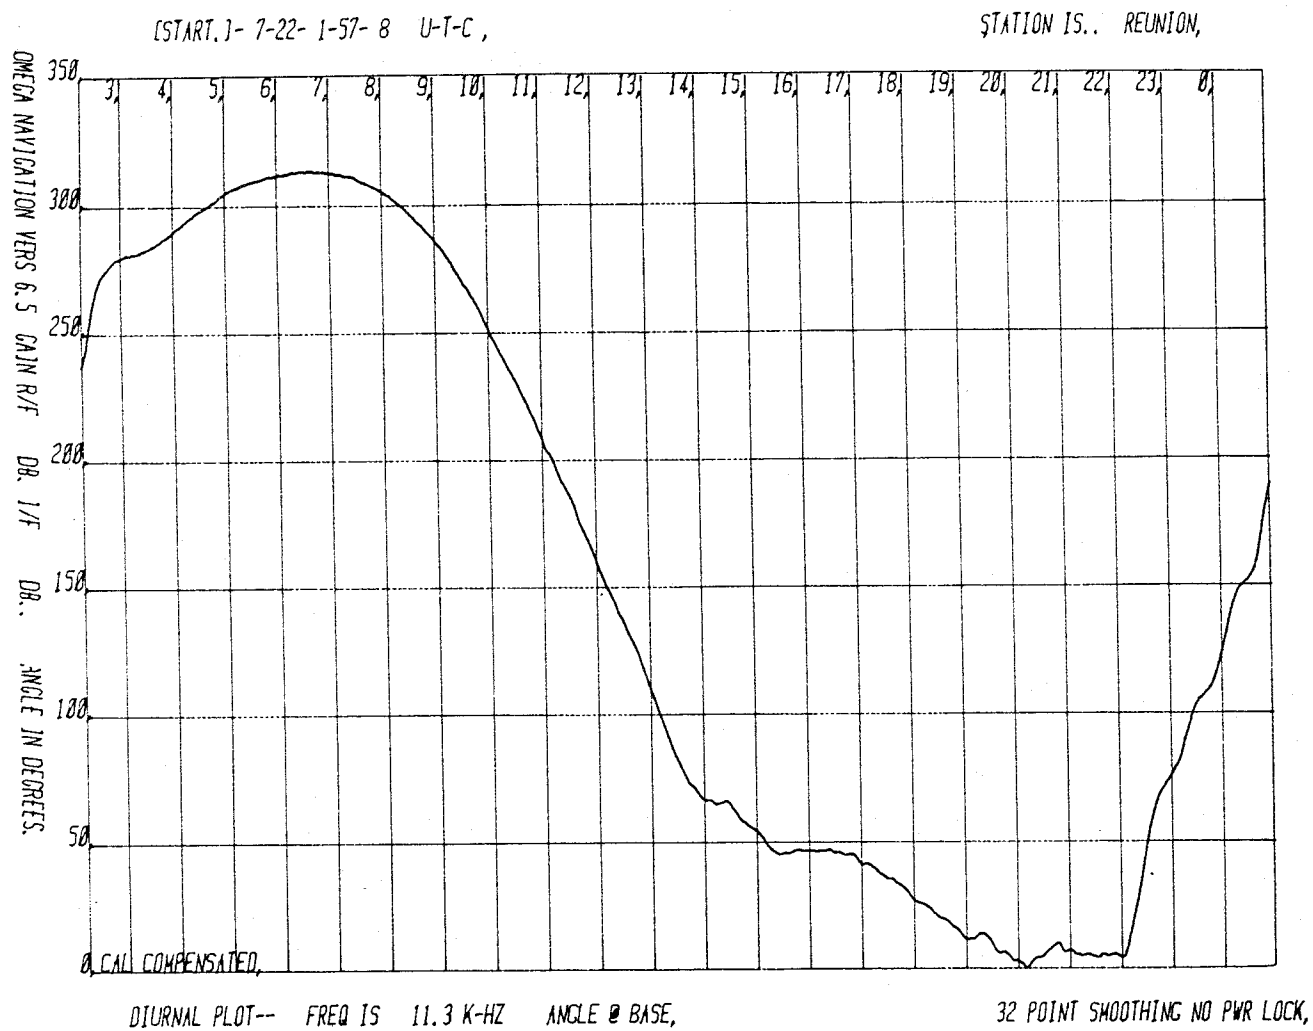
Figure 21. Diurnal phase plot, Omega Reunion, 11-1/3 kHz
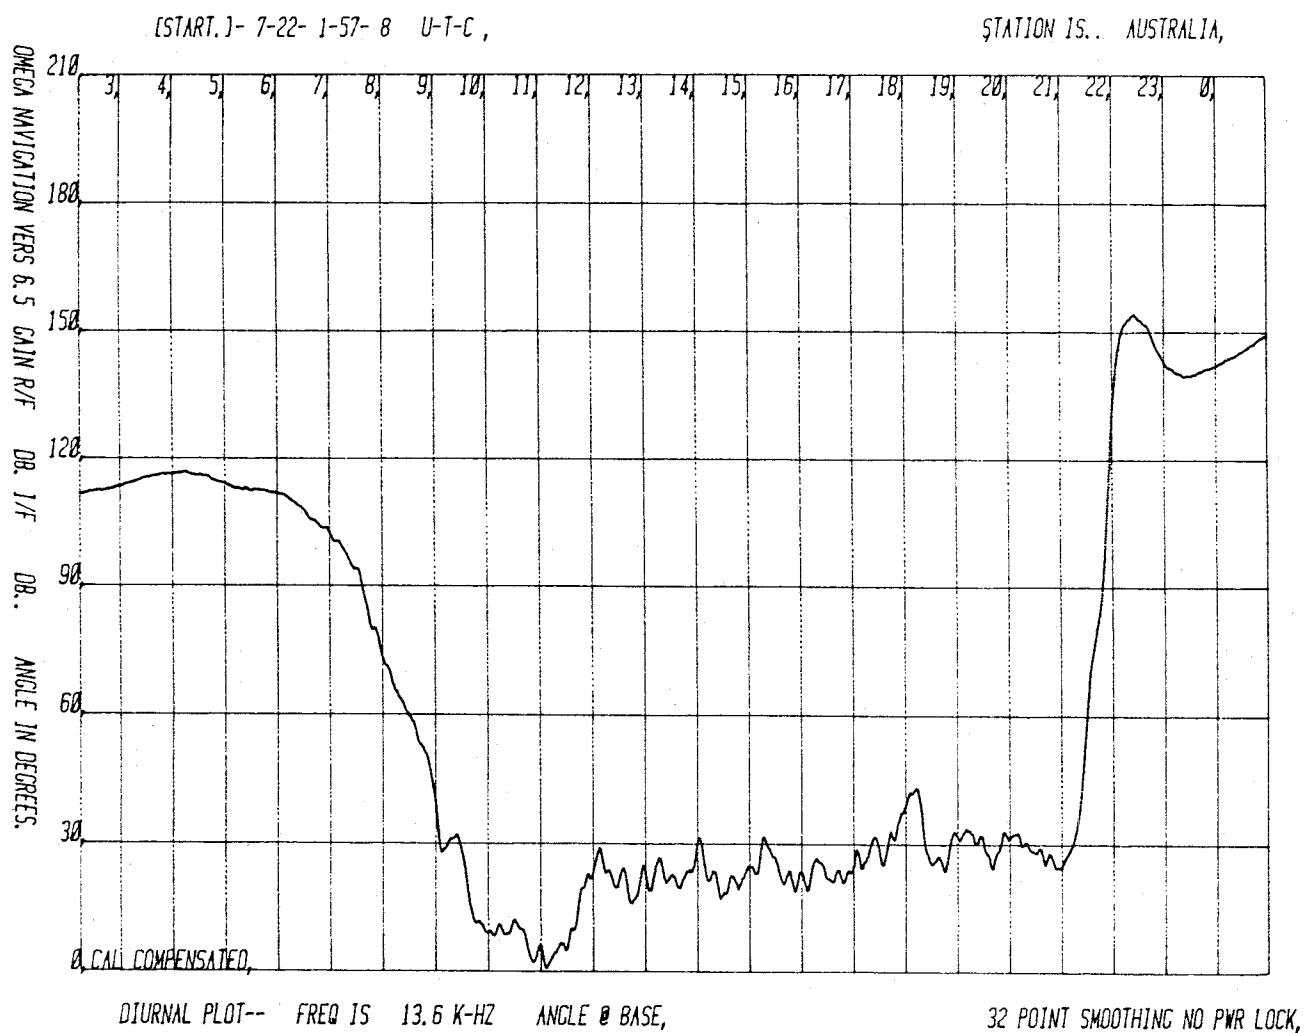
Figure 22.   Diurnal phase plot, Omega Australia, 13.6 kHz
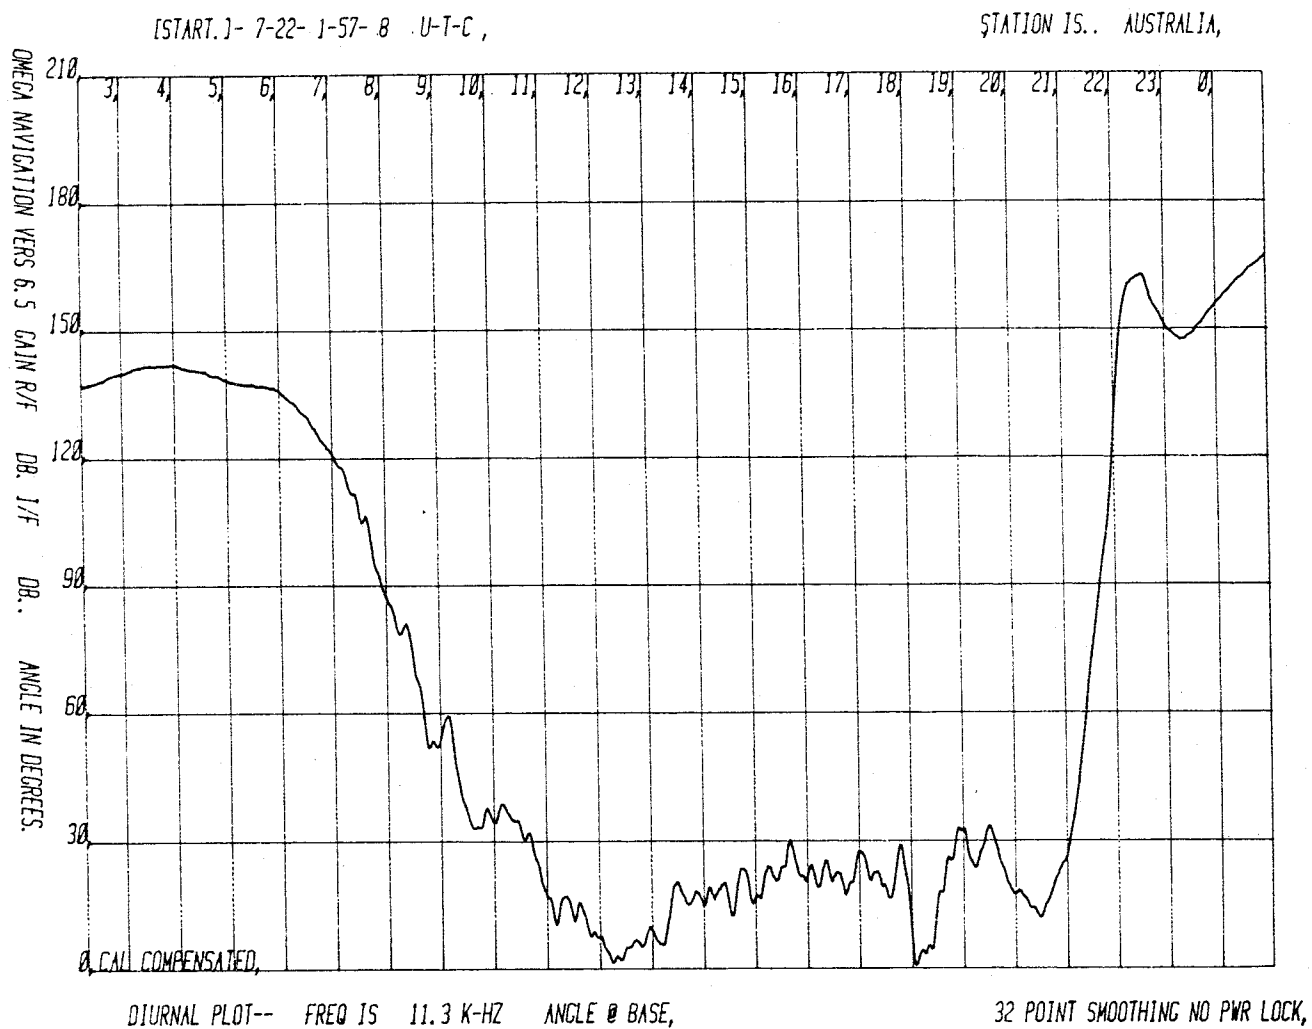
Figure 23. Diurnal phase plot, Omega Australia, 11-1/3 kHz
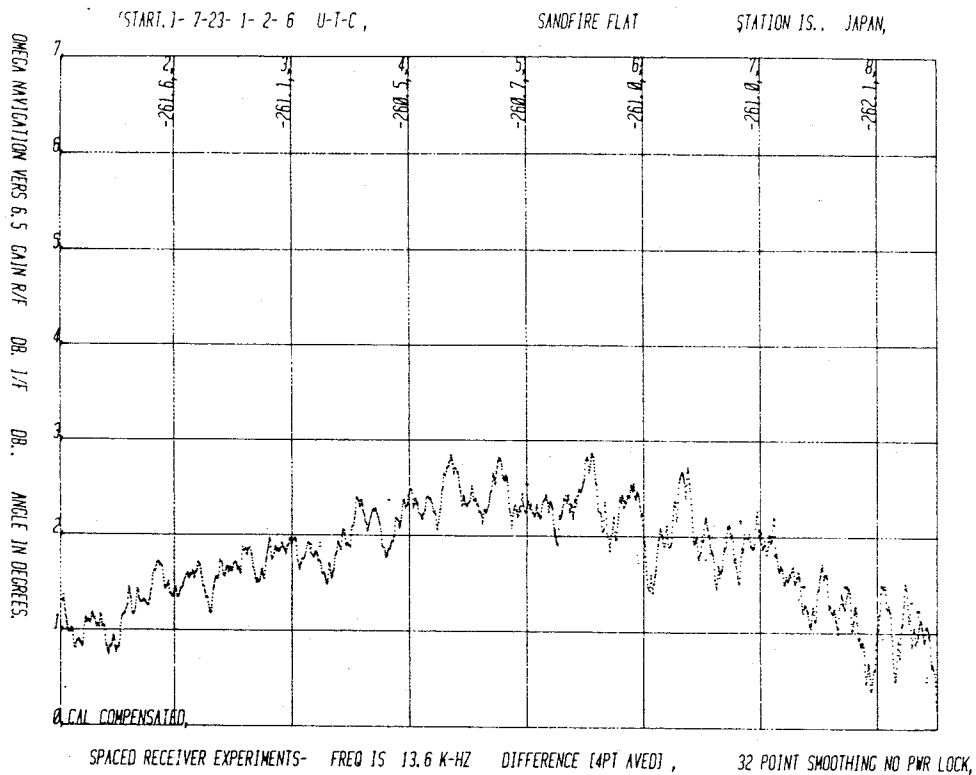
Figure 24. Sandfire Flat, Japan, 13.6 kHz
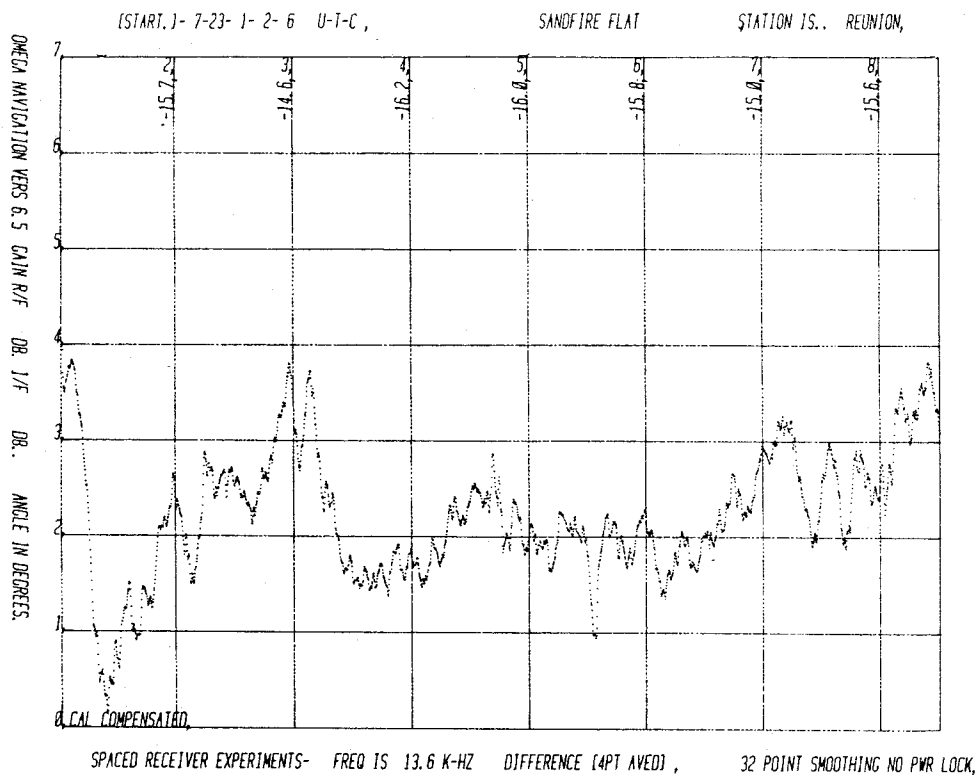
Figure 25. Sandfire Flat, Reunion, 13.6 kHz
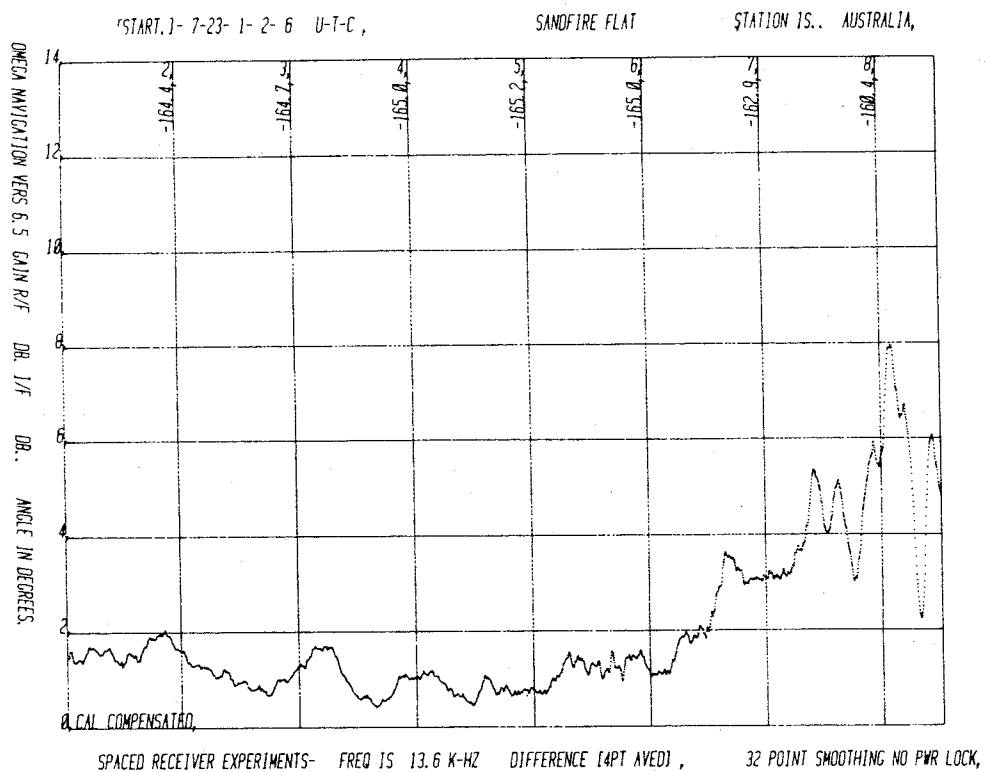
Figure 26. Sandfire Flat, Australia, 13.6 kHz

[START.]- 7-23- 1- 2- 6 U-T-C ,   SANDFIRE FLAT   STATION IS.. JAPAN,
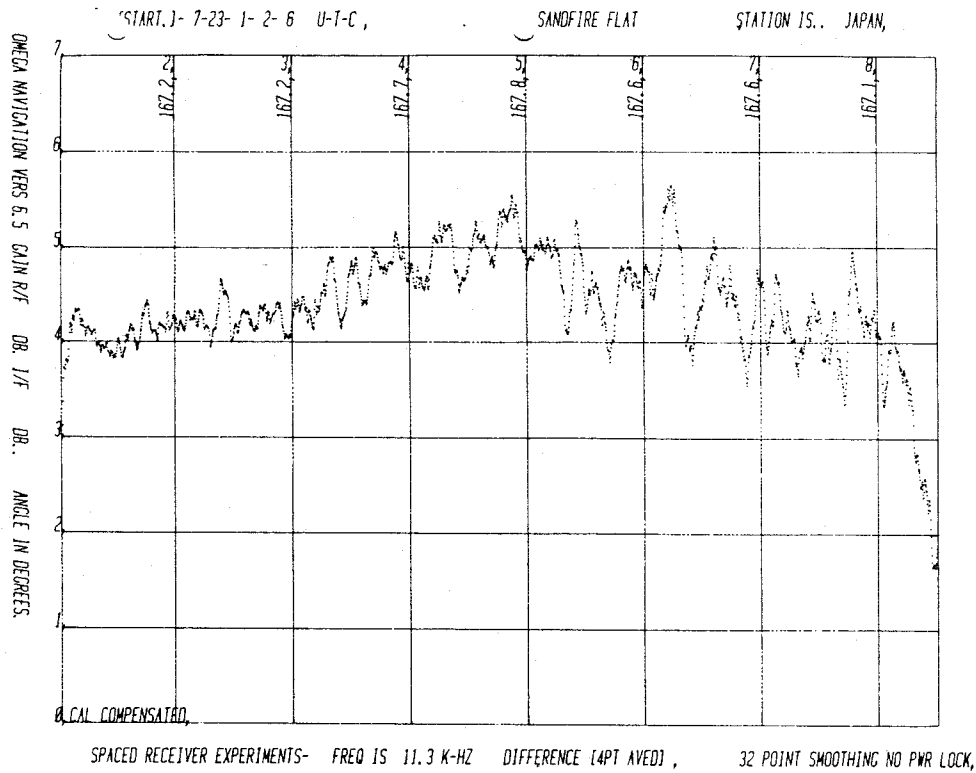
Figure 27. Sandfire Flat, Japan, 11-1/3 kHz

[START.]- 7-23- 1- 2- 6 U-T-C ,   SANDFIRE FLAT   STATION IS.. REUNION,
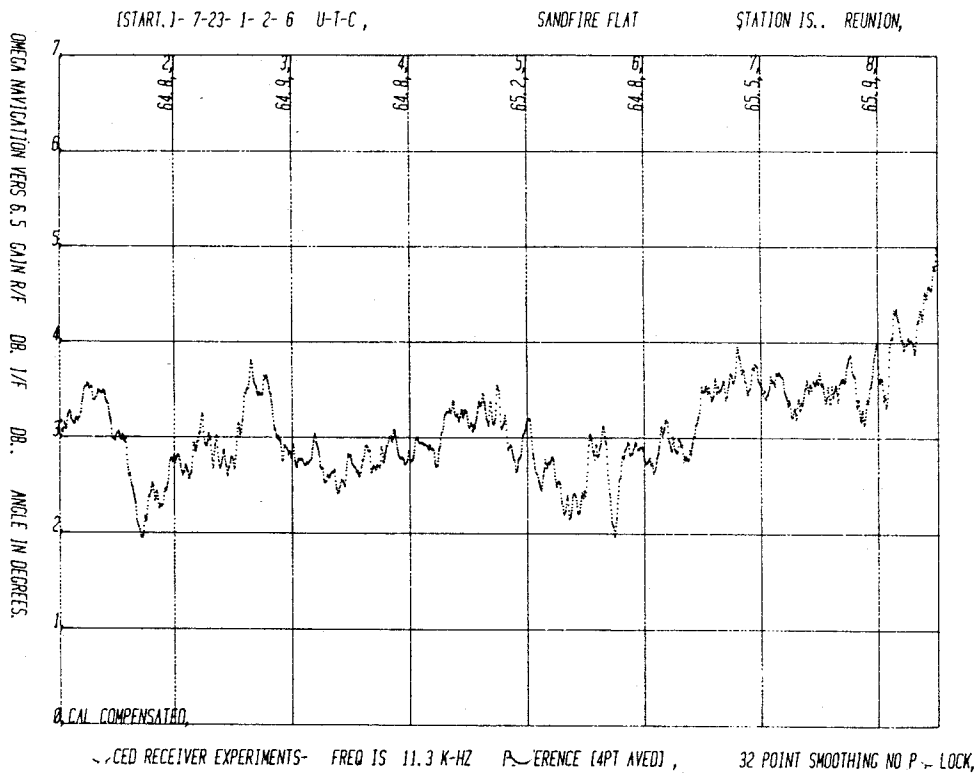
Figure 28. Sandfire Flat, Reunion, 11-1/3 kHz
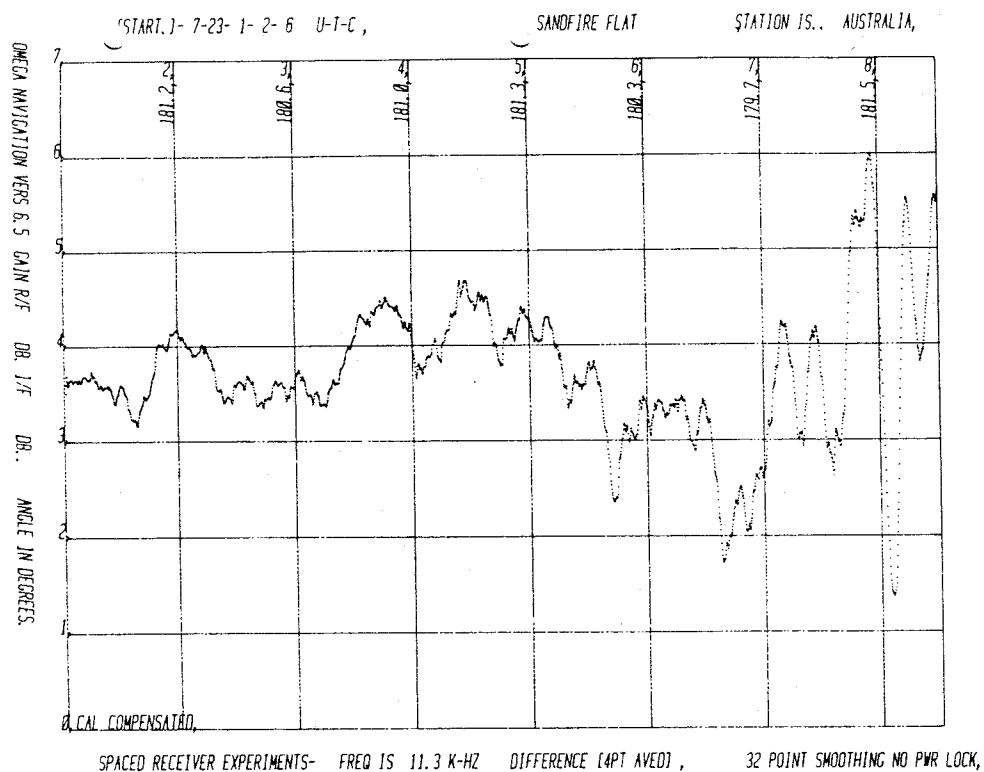
Figure 29. Sandfire Flat, Australia, 11-1/3 kHz
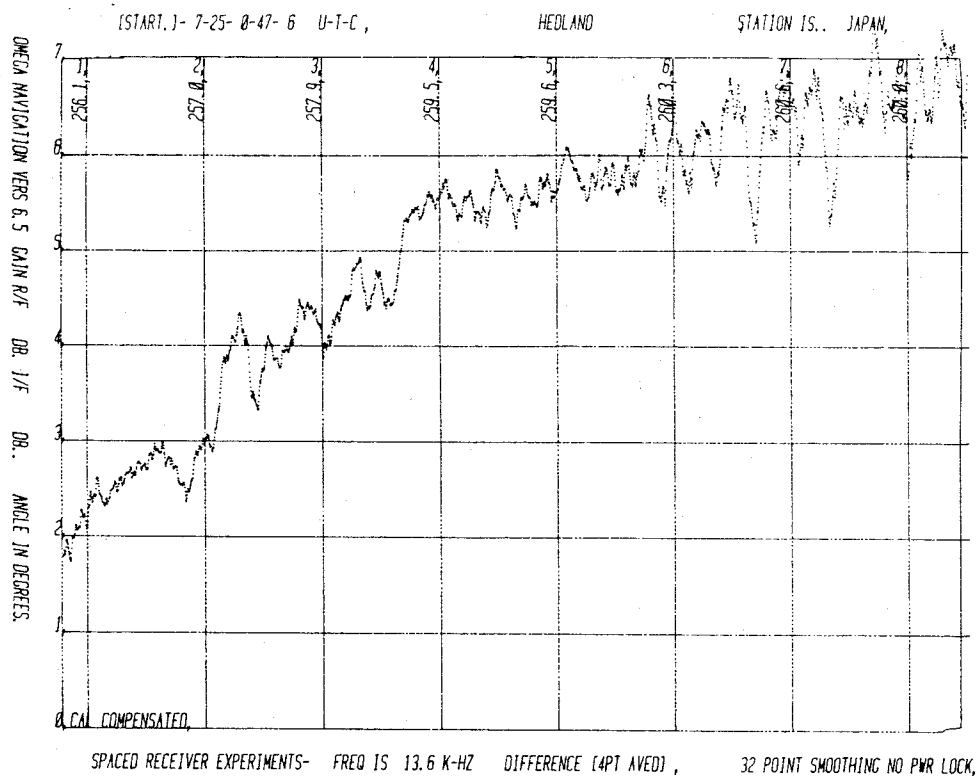
Figure 30. Pt Hedland, Japan, 13.6 kHz
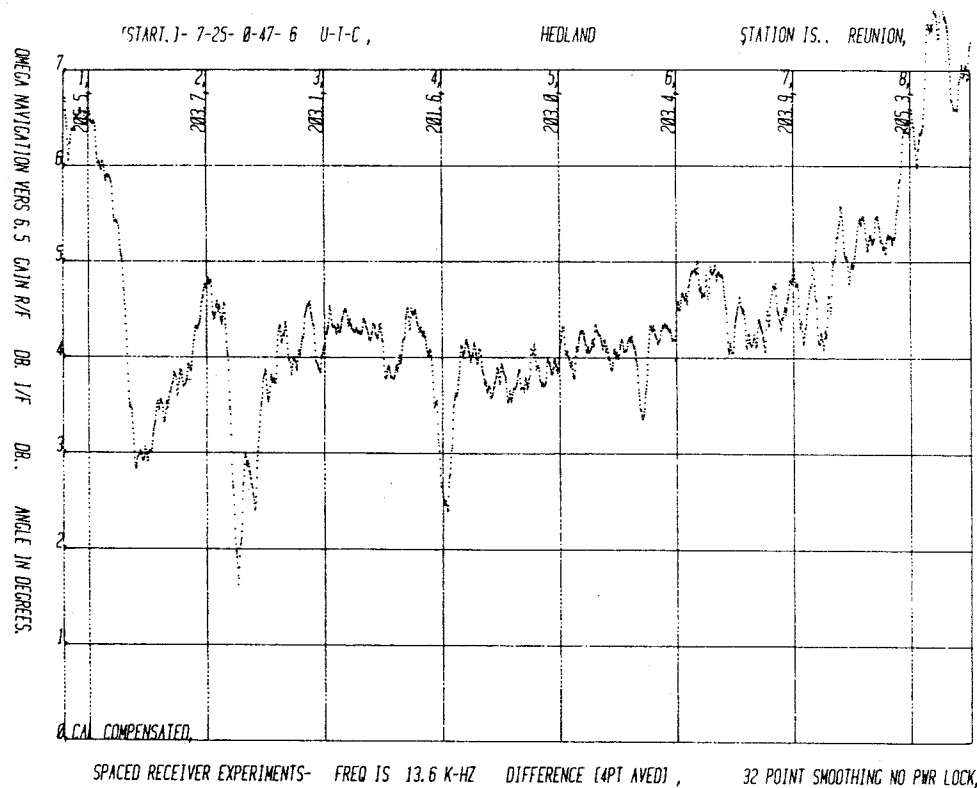
Figure 31. Pt Hedland, Reunion, 13.6 kHz
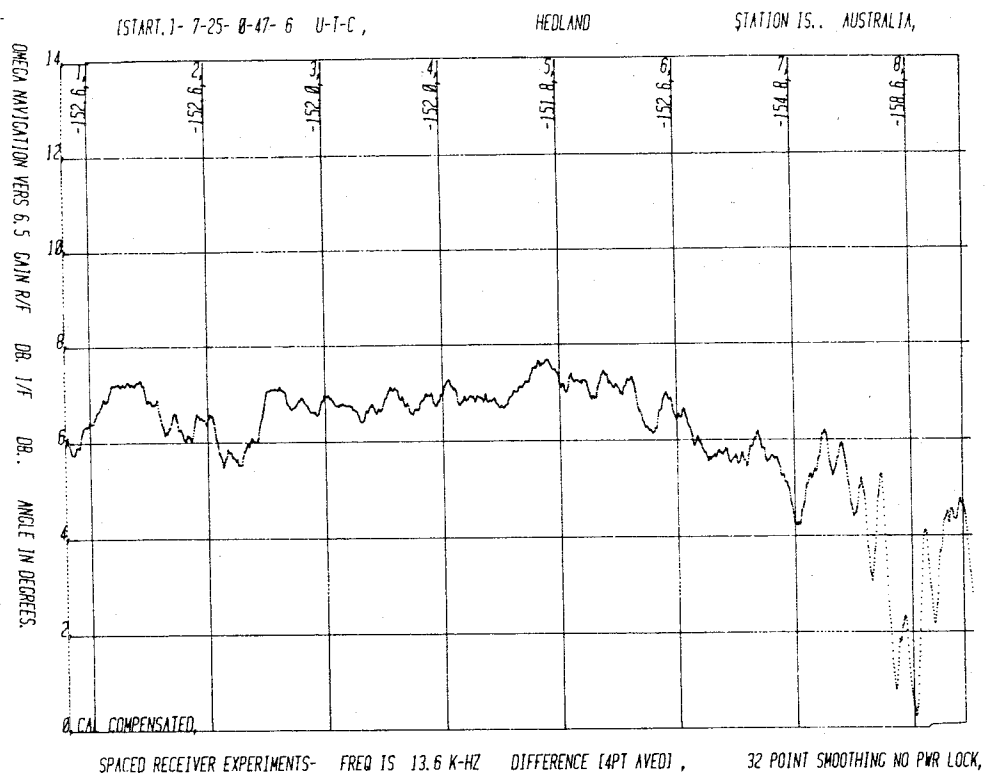
Figure 32. Pt Hedland, Australia, 13.6 kHz
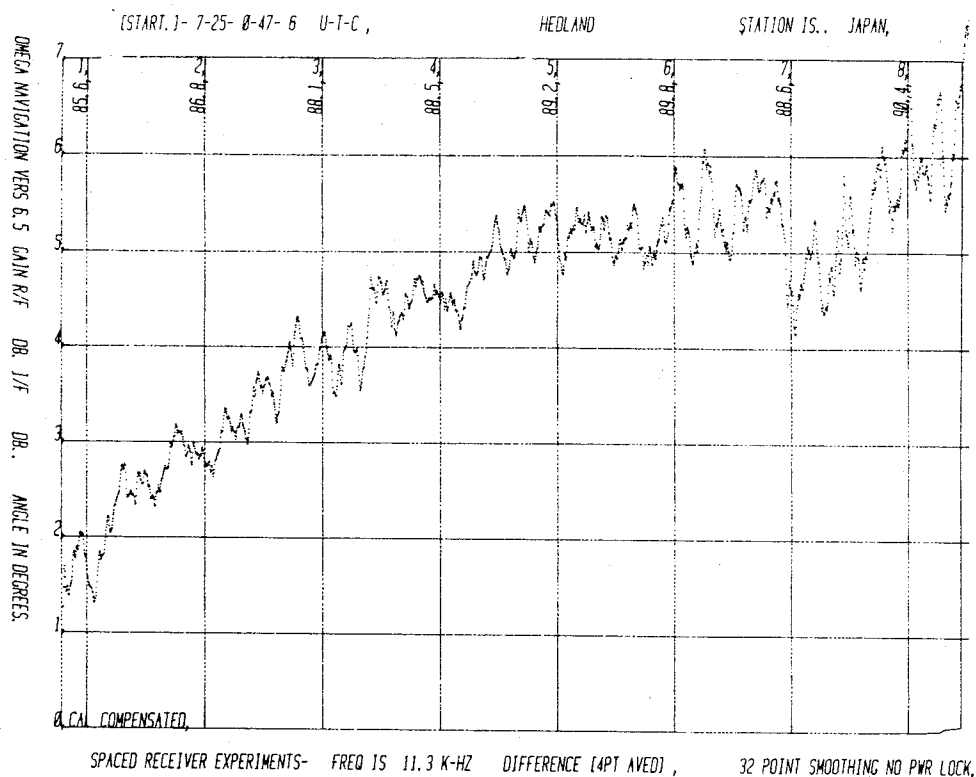
Figure 33. Pt Hedland, Japan, 11-1/3 kHz
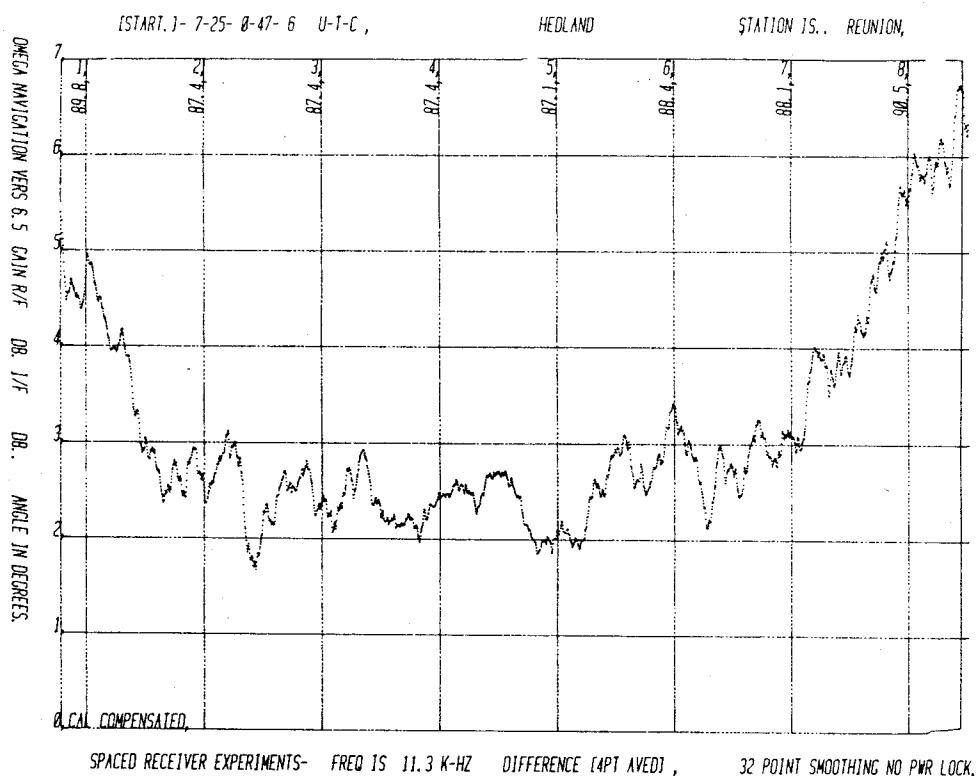
Figure 34. Pt Hedland, Reunion, 11-1/3 kHz
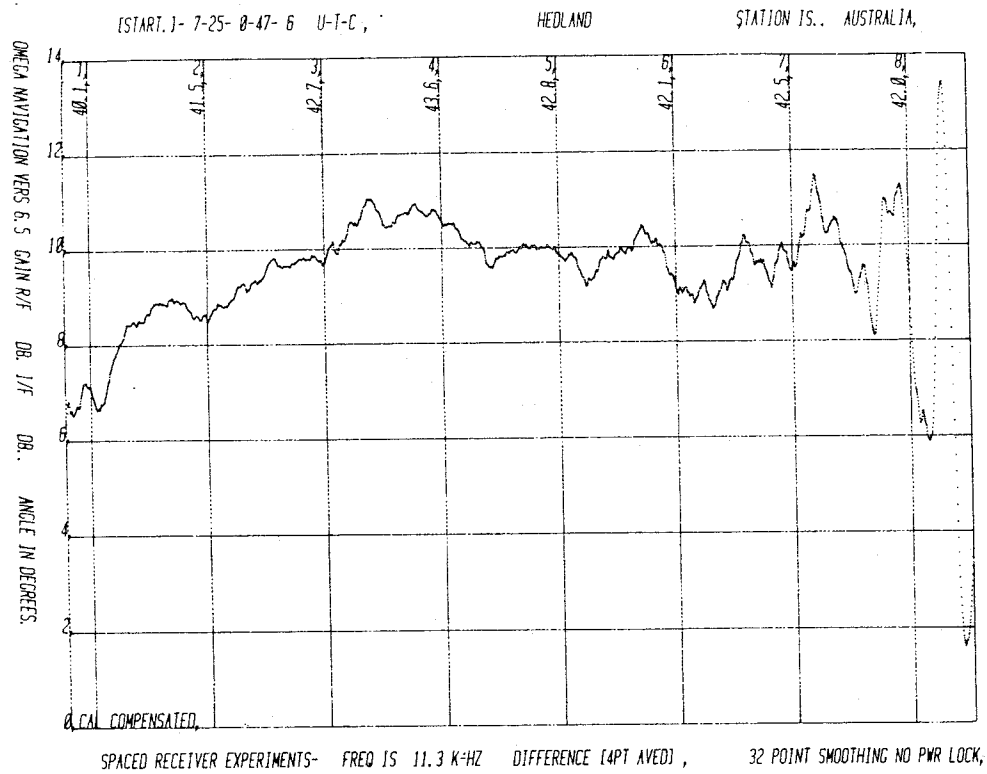
Figure 35. Pt Hedland, Australia, 11-1/3 kHz
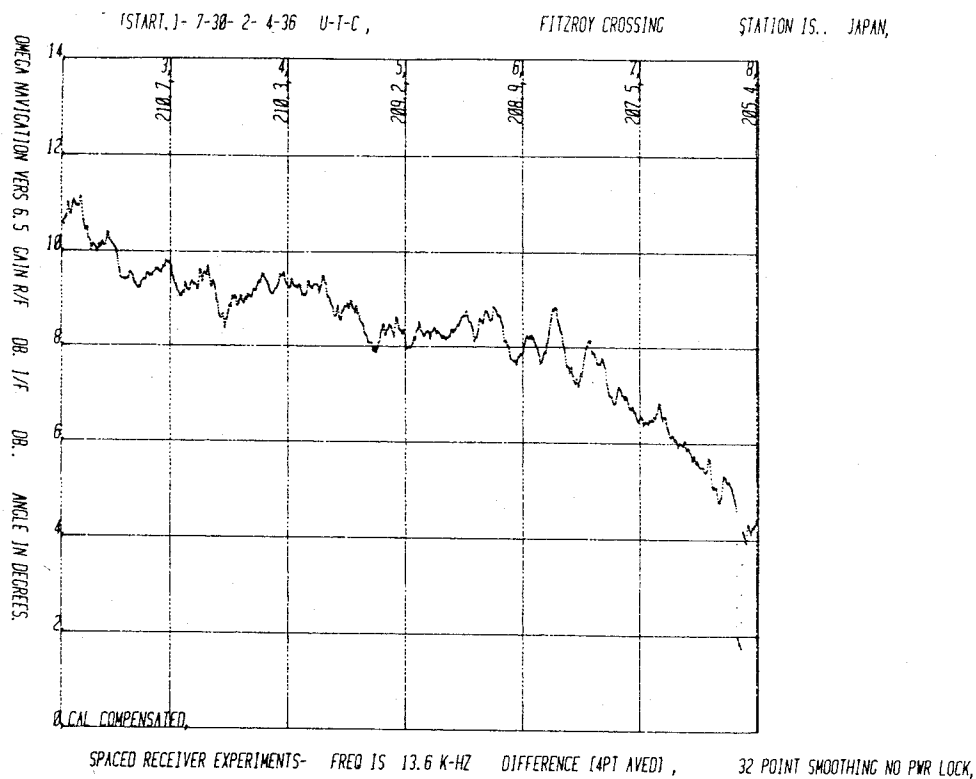
Figure 36. Fitzroy Crossing, Japan, 13.6 kHz
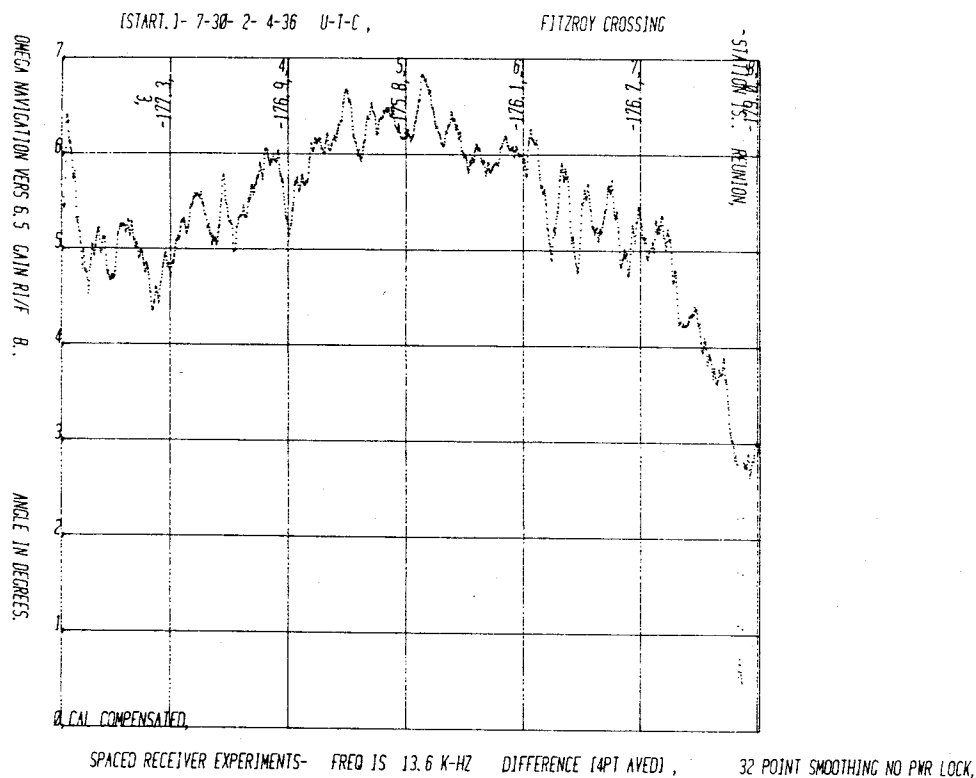
Figure 37. Fitzroy Crossing, Reunion, 13.6 kHz

Figure 38. Fitzroy Crossing, Australia, 13.6 kHz
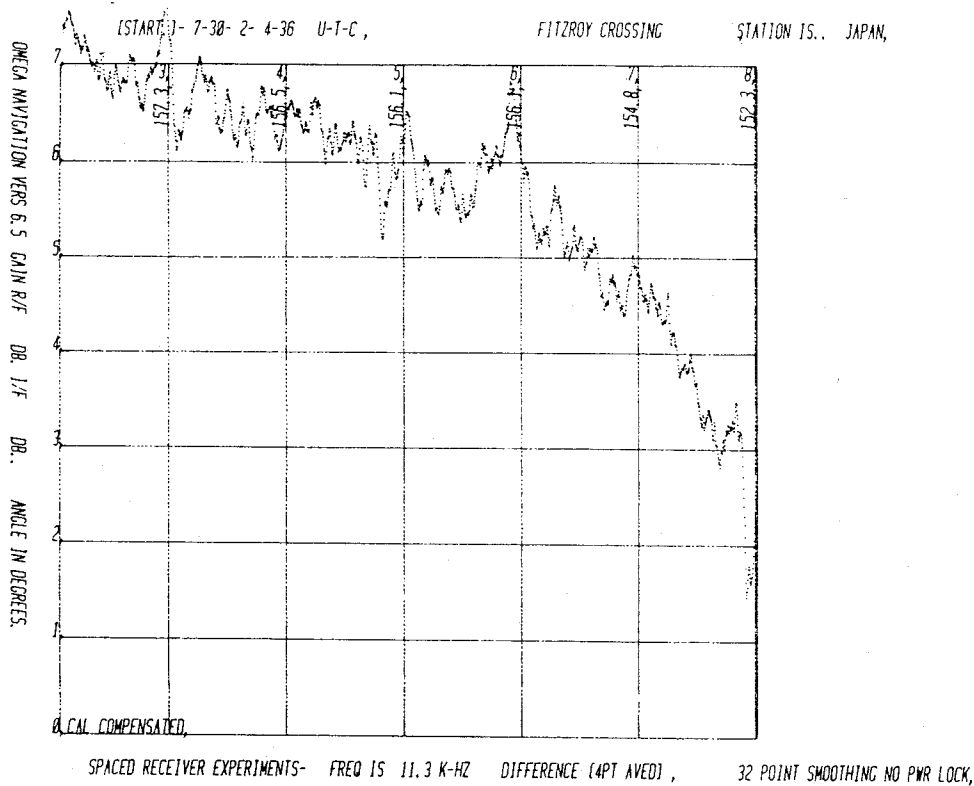
Figure 39. Fitzroy Crossing, Japan, 11-1/3 kHz
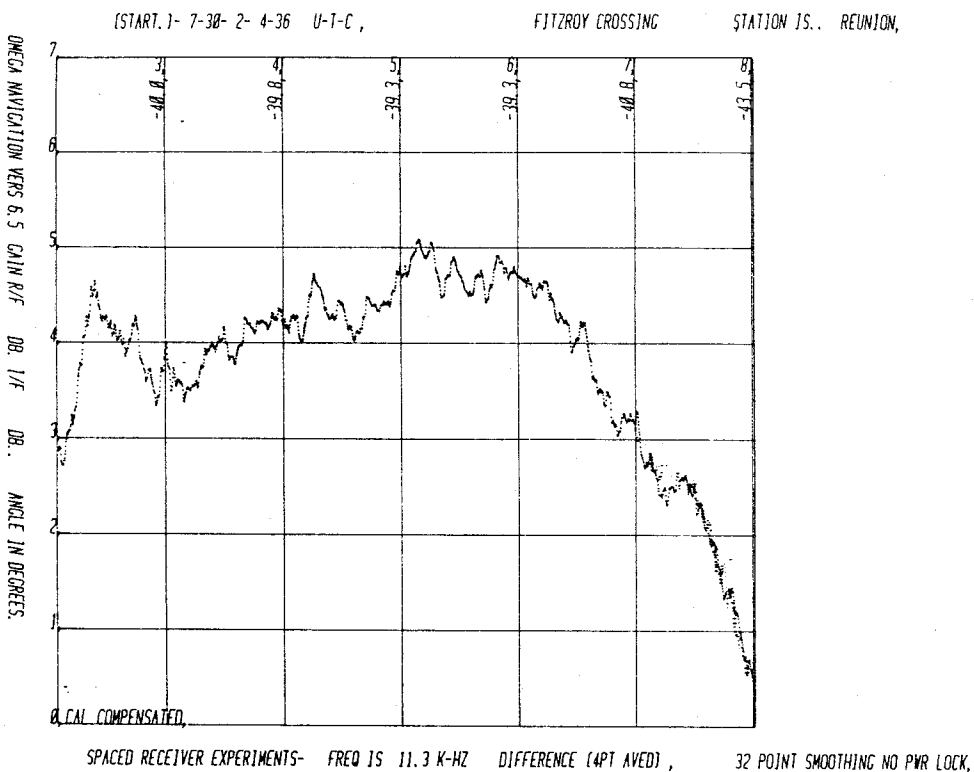
Figure 40. Fitzroy Crossing, Reunion, 11-1/3 kHz
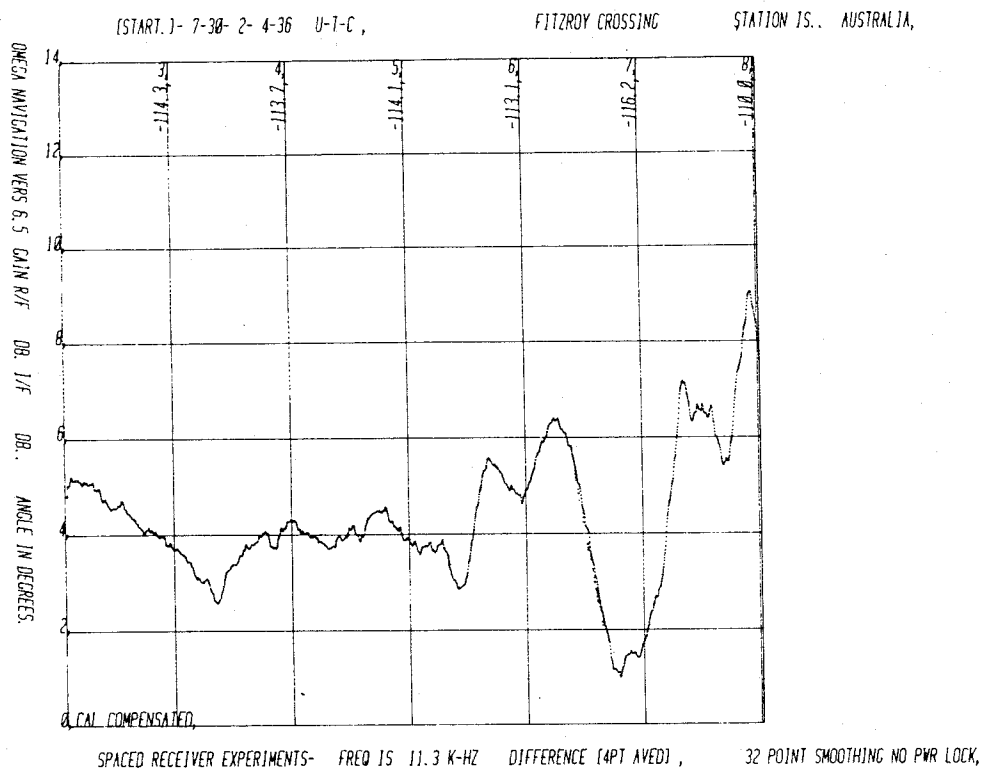
Figure 41. Fitzroy Crossing, Australia, 11-1/3 kHz
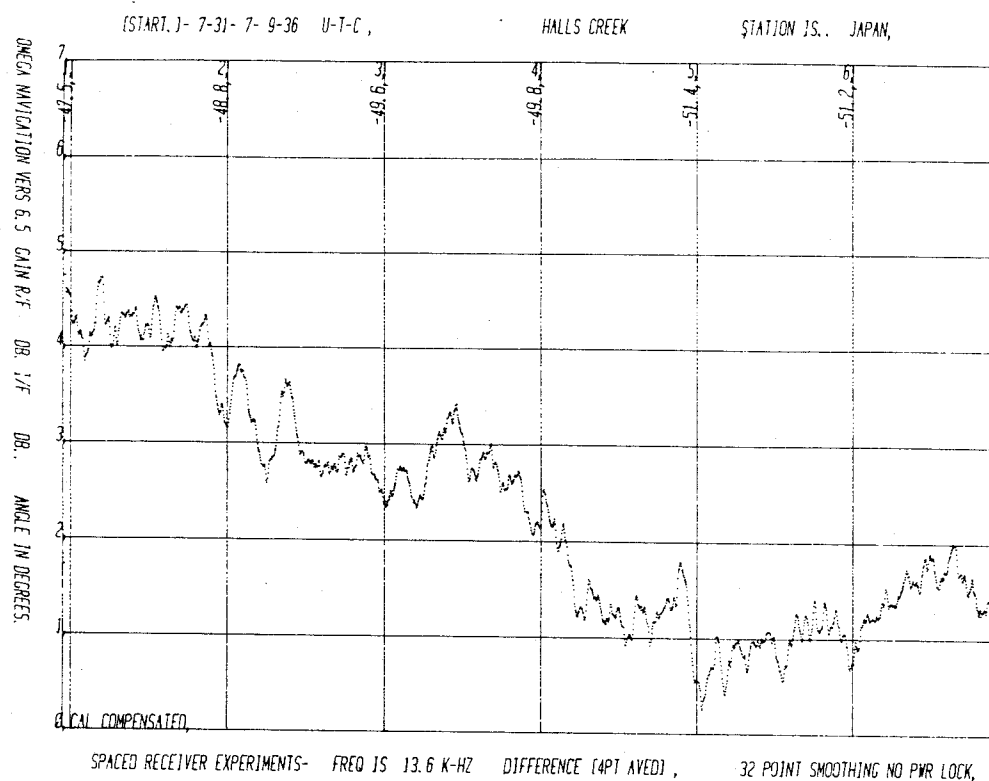
Figure 42. Halls Creek, Japan, 13.6 kHz
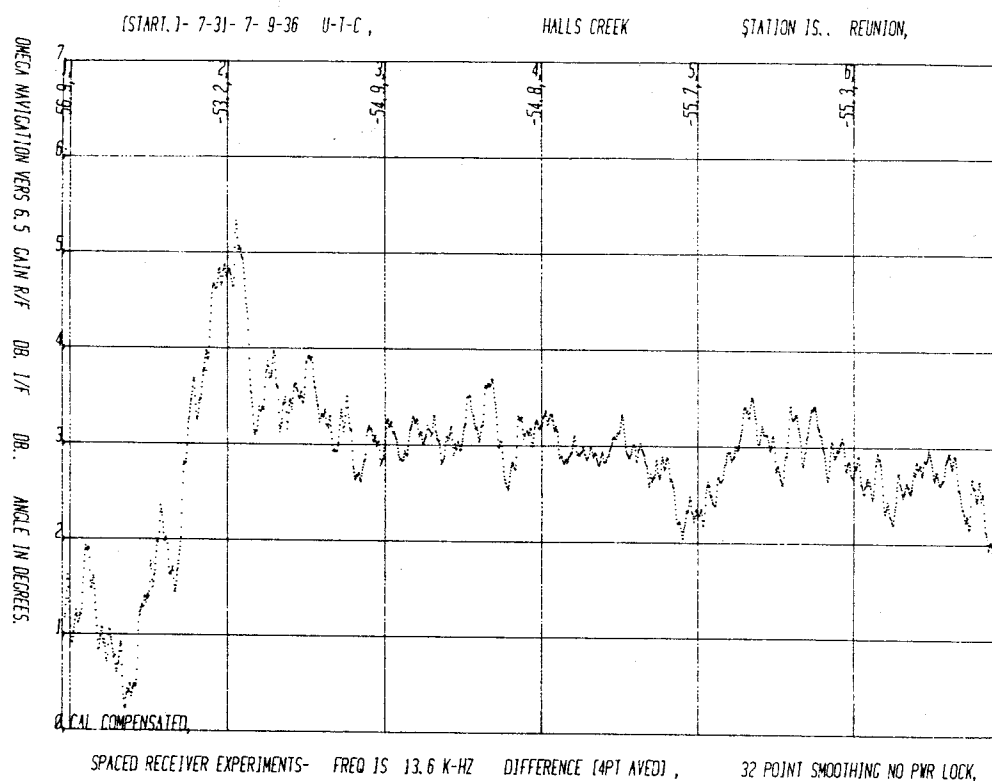
Figure 43. Halls Creek, Reunion, 13.6 kHz
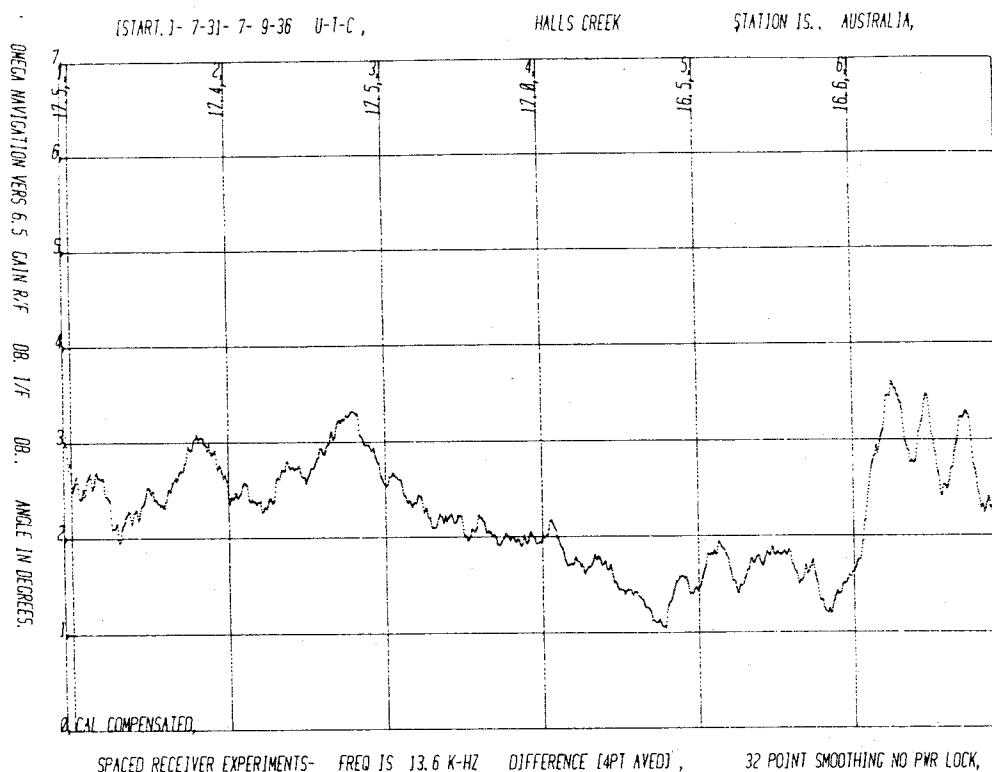
Figure 44. Halls Creek, Australia, 13.6 kHz
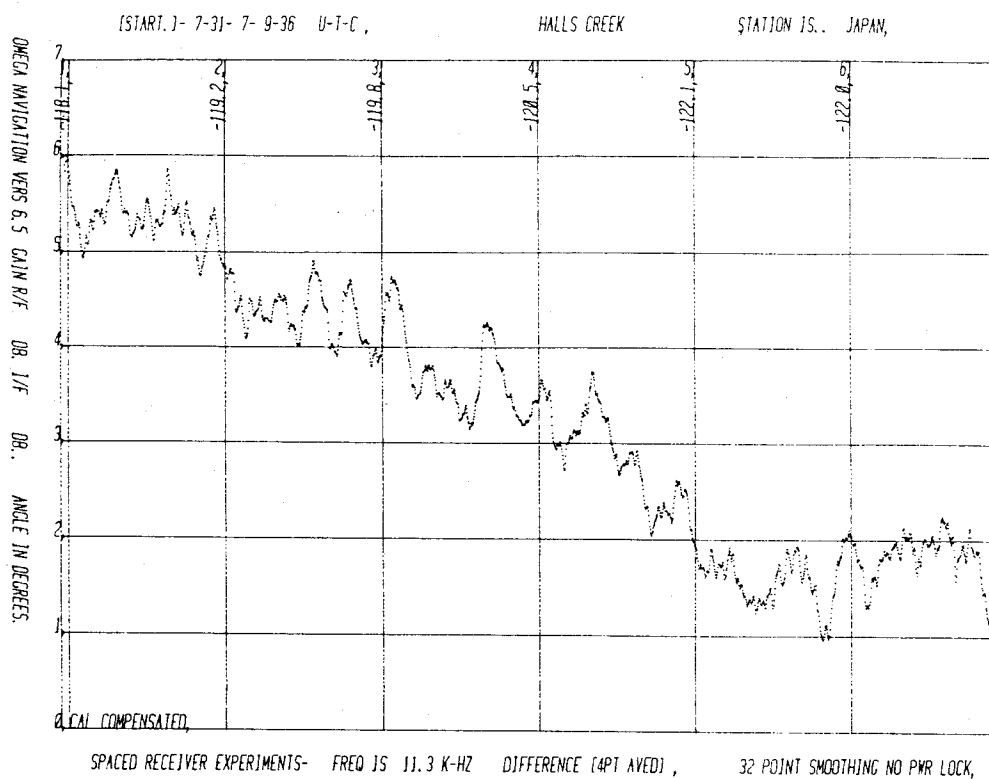
Figure 45. Halls Creek, Japan, 11-1/3 kHz
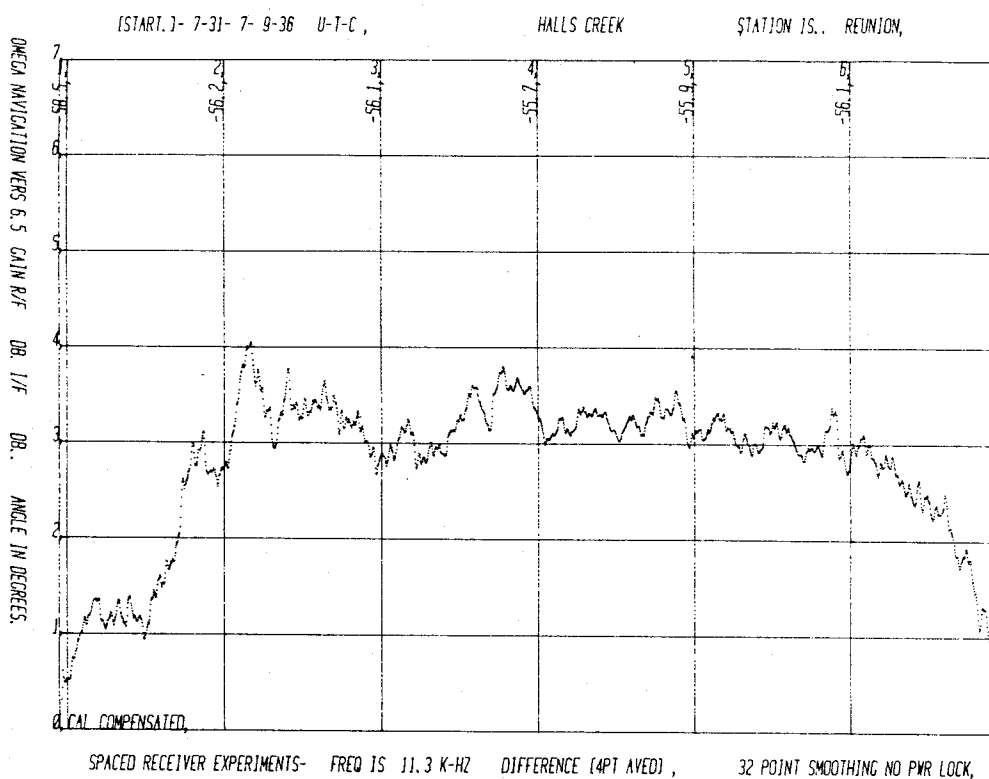
Figure 46. Halls Creek, Reunion, 11-1/3 kHz
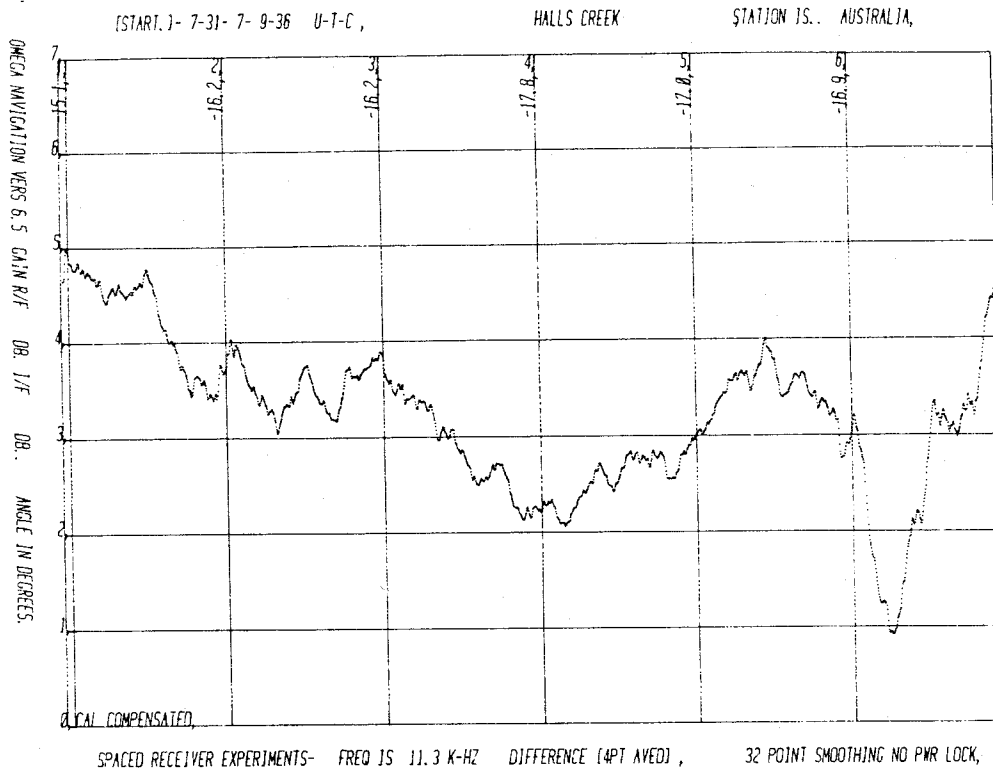
Figure 47. Halls Creek, Australia, 11-1/3 kHz

[START.]- 8- 3- 0-57- 6   U-T-C ,   DINGO SPRINGS   STATION IS.. JAPAN,
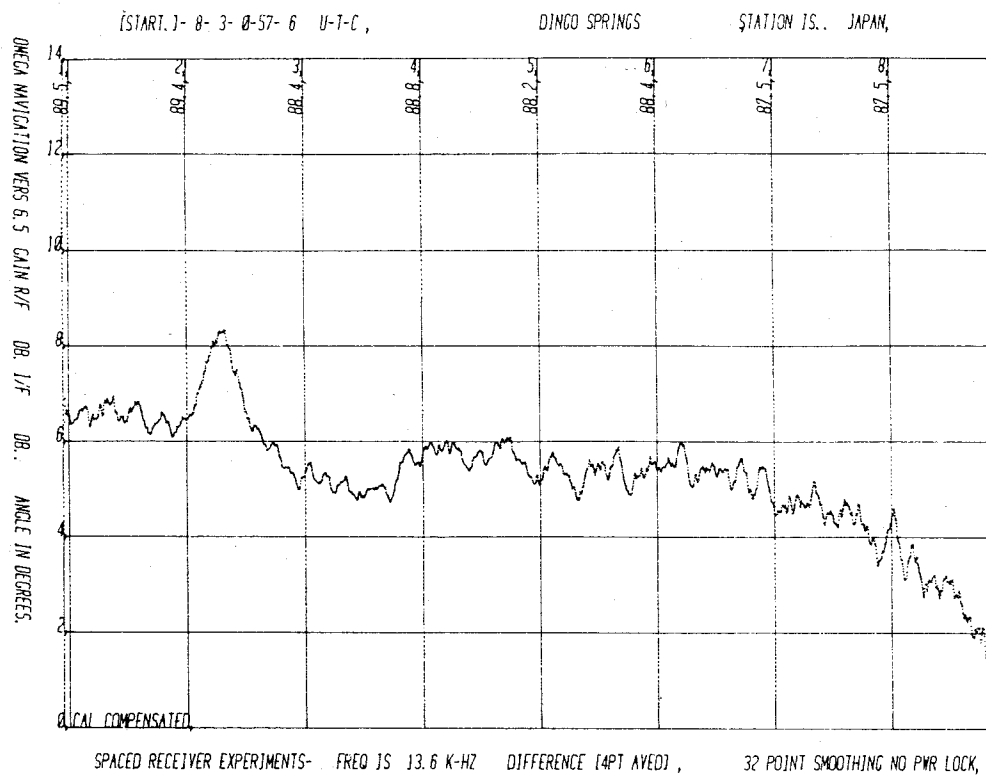
Figure 48.   Dingo Springs, Japan, 13.6 kHz

[START.]- 8- 3- 0-57- 6   U-T-C ,   DINGO SPRINGS   STATION IS.. REUNION,
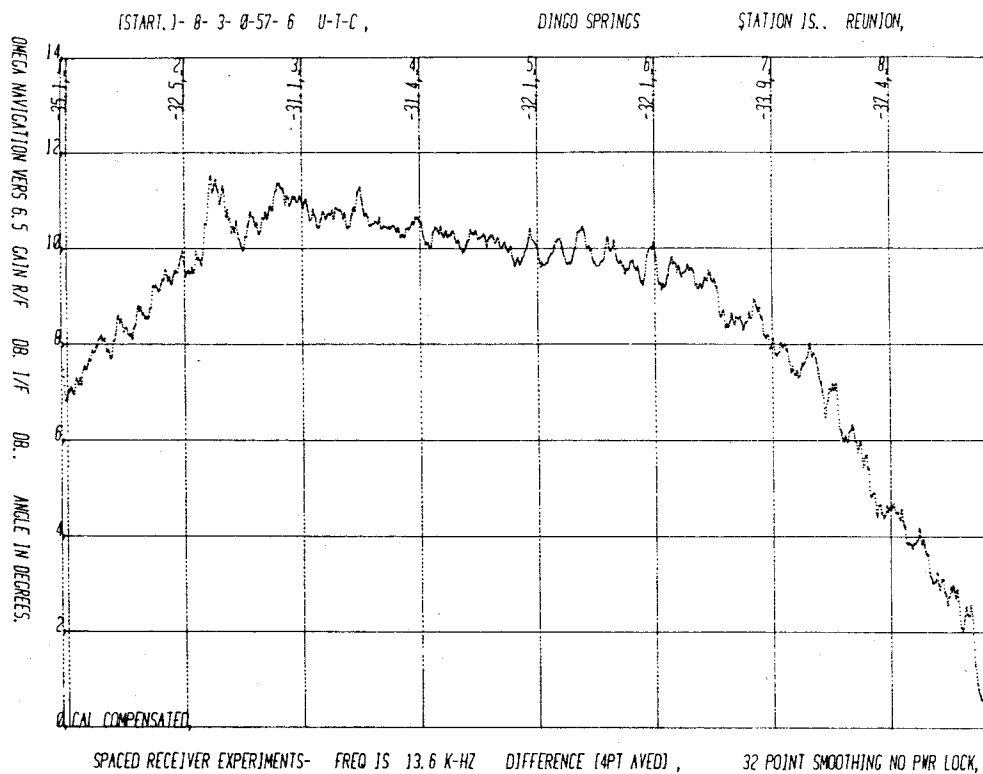
Figure 49.   Dingo Springs, Reunion, 13.6 kHz

Figure 50. Dingo Springs, Australia, 13.6 kHz

[START.]- 8- 3- 0-57- 6   U-T-C ,   DINGO SPRINGS   STATION IS.. JAPAN,

SPACED RECEIVER EXPERIMENTS-   FREQ IS 11.3 K-HZ   DIFFERENCE [4PT AVED] ,   32 POINT SMOOTHING NO PWR LOCK,
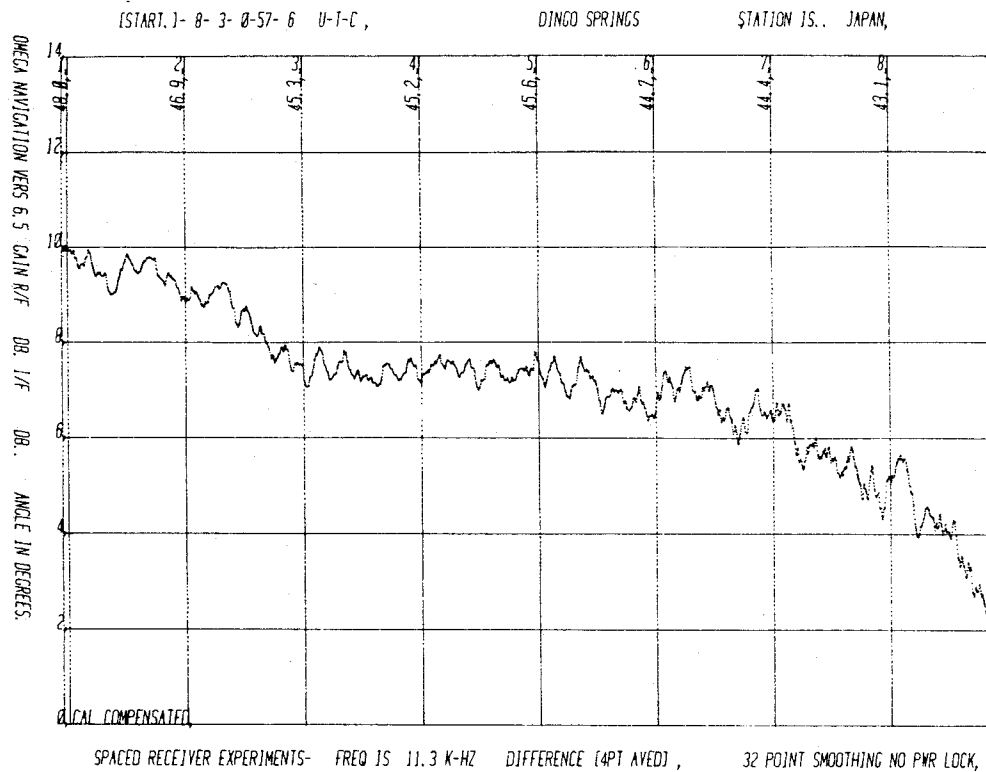
Figure 51. Dingo Springs, Japan, 11-1/3 kHz

[START.]- 8- 3- 0-57- 6   U-T-C ,   DINGO SPRINGS   STATION IS.. REUNION,

SPACED RECEIVER EXPERIMENTS-   FREQ IS 11.3 K-HZ   DIFFERENCE [4PT AVED] ,   32 POINT SMOOTHING NO PWR LOCK,
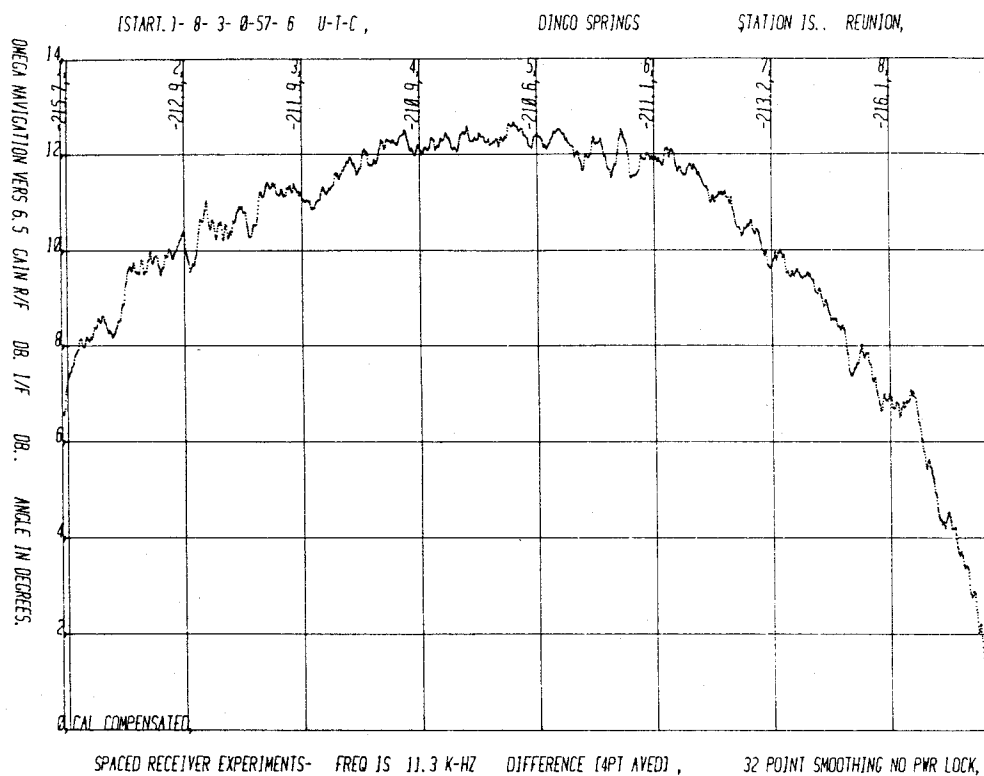
Figure 52. Dingo Springs, Reunion, 11-1/3 kHz
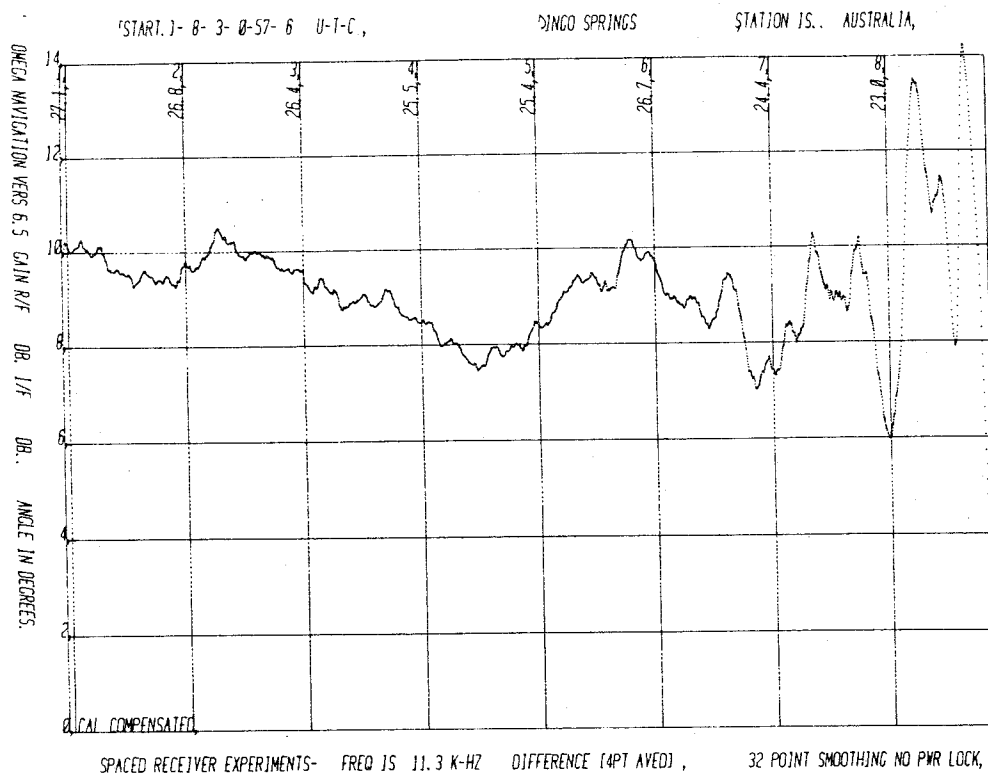
Figure 53. Dingo Springs, Australia, 11-1/3 kHz
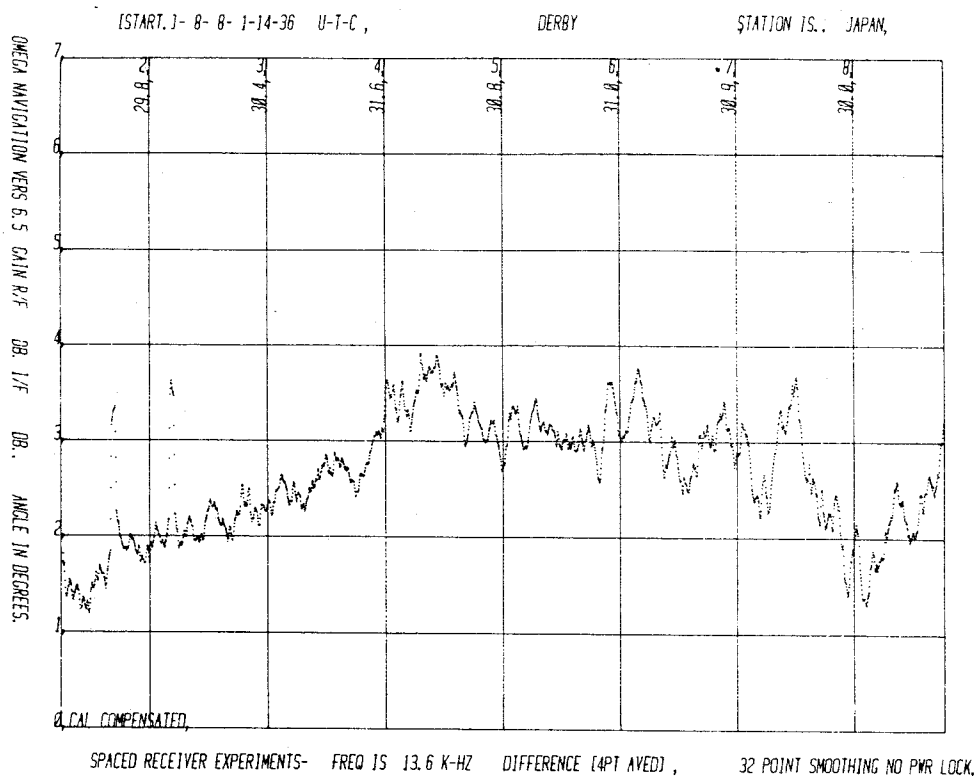
Figure 54. Derby, Japan, 13.6 kHz
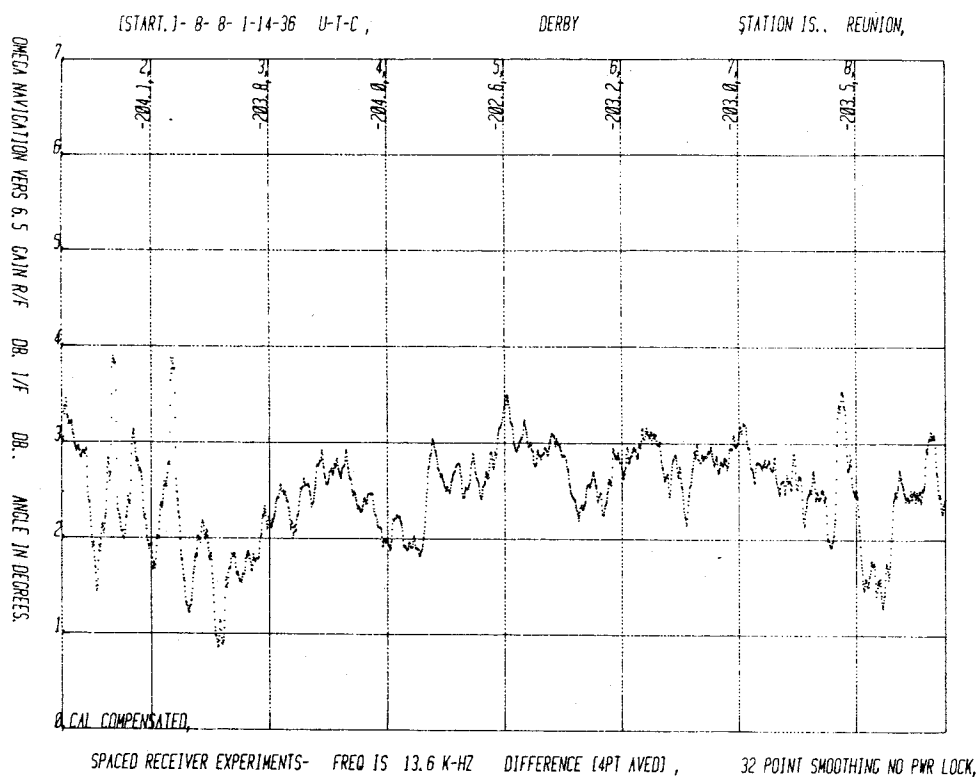
Figure 55. Derby, Reunion, 13.6 kHz
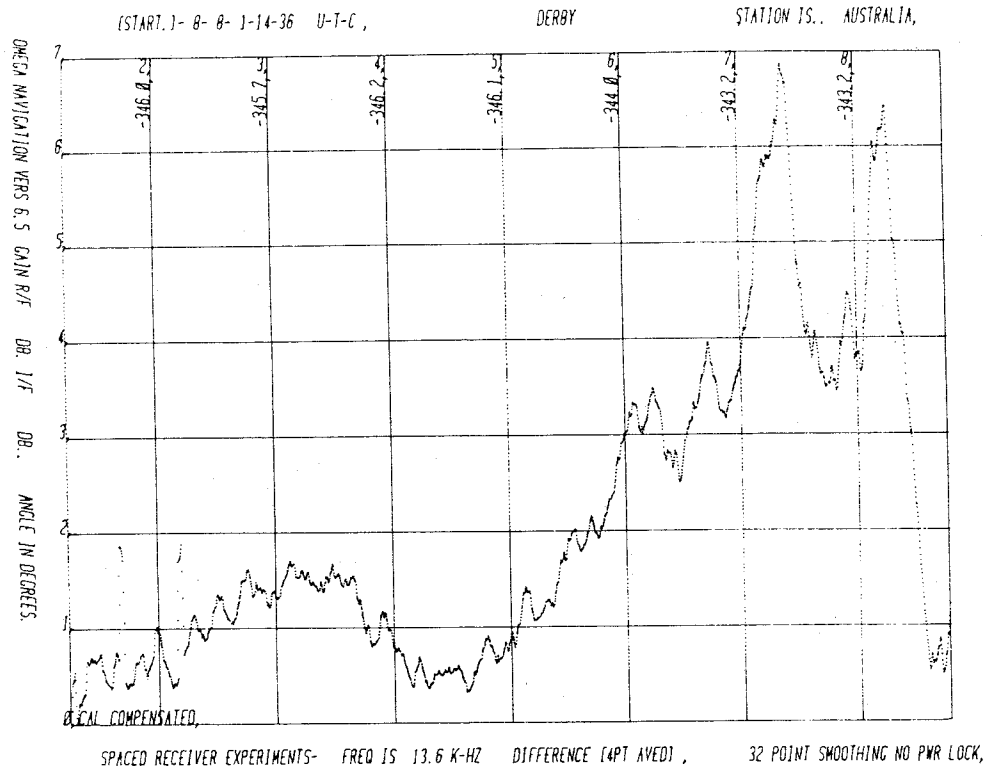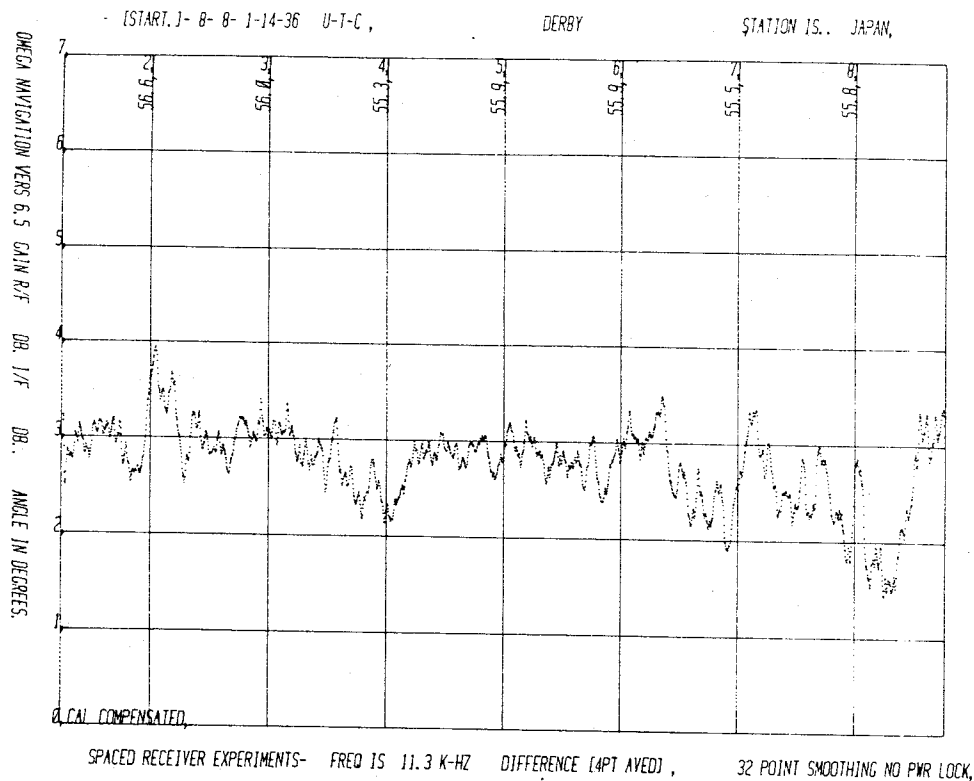
Figure 56.   Derby, Australia, 13.6 kHz
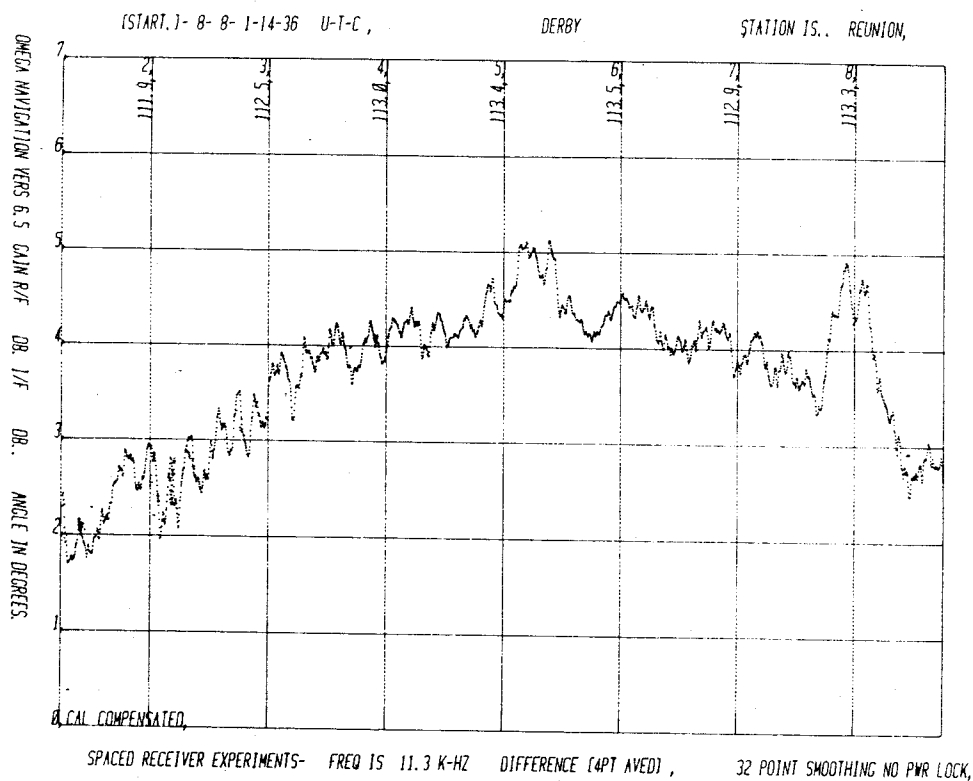
Figure 57. Derby, Japan, 11-1/3 kHz

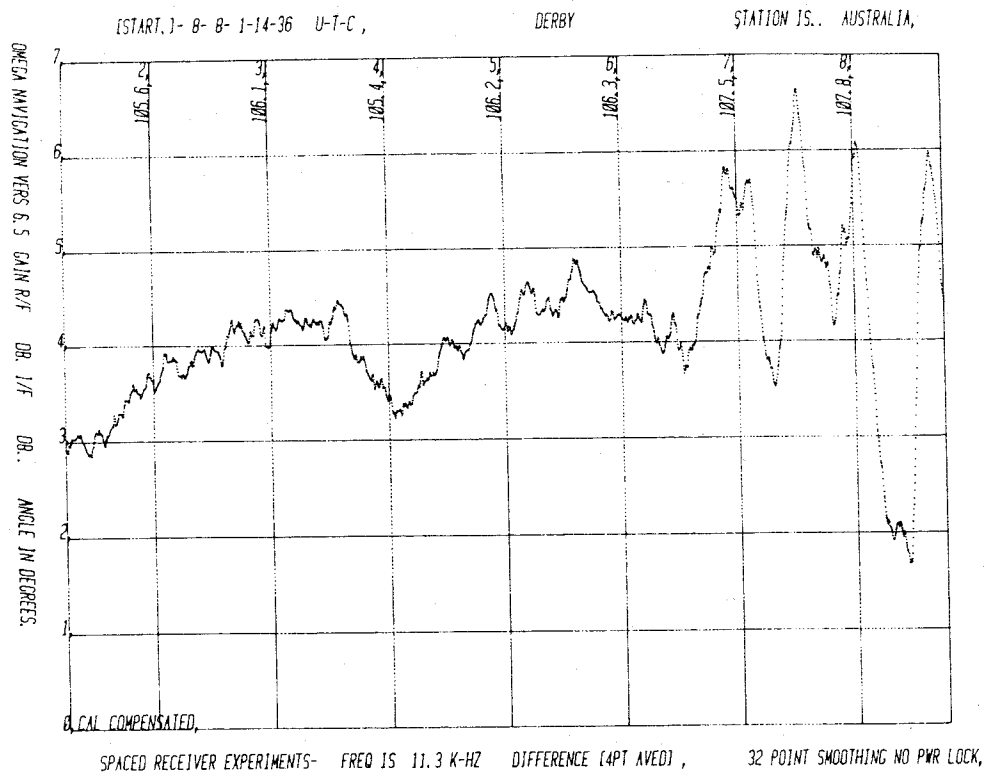Figure 58. Derby, Reunion, 11-1/3 kHz
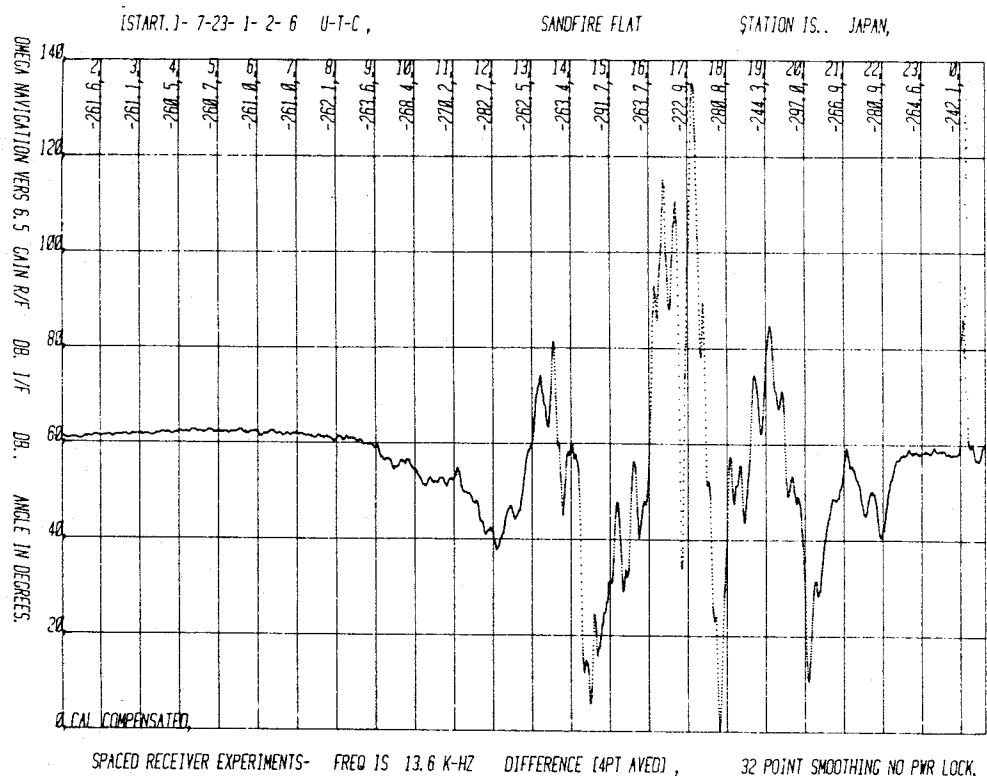
Figure 59.   Derby, Australia, 11-1/3 kHz

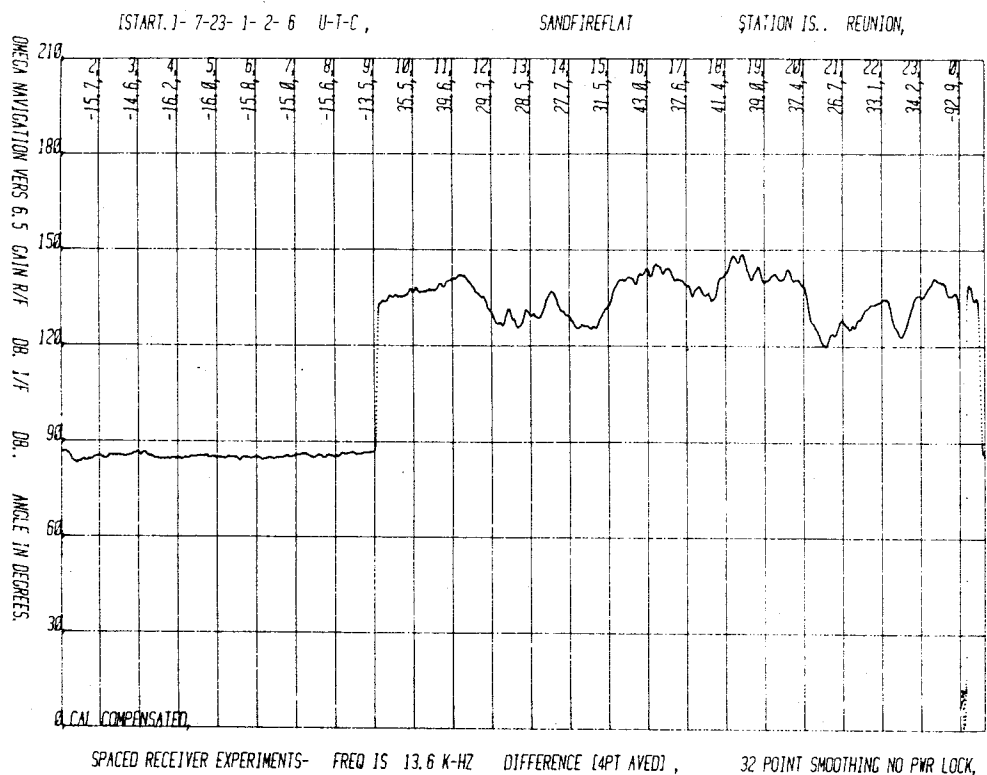Figure 60. Sandfire Flat, Japan, 13.6 kHz
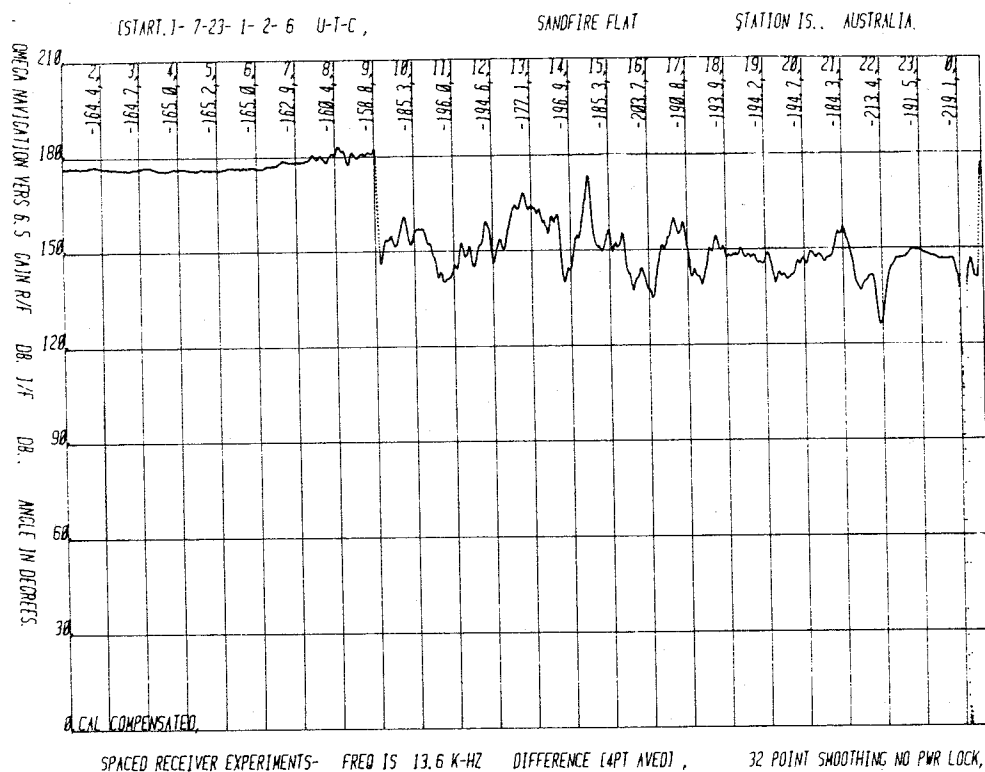

Figure 61. Sandfire Flat, Reunion, 13.6 kHz

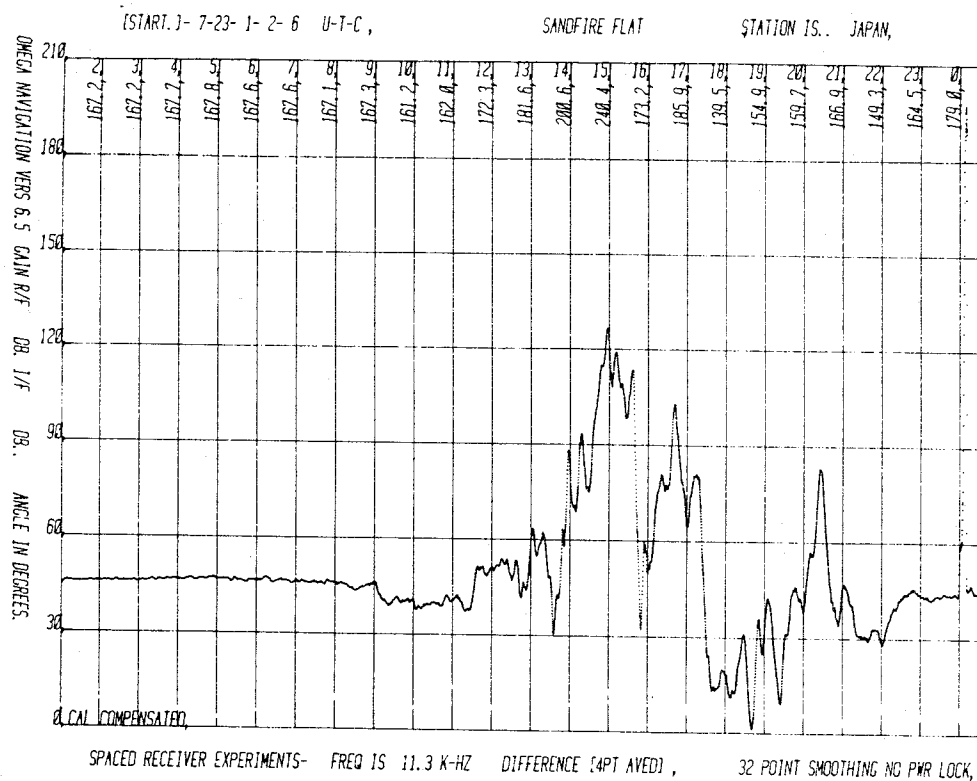Figure 62. Sandfire Flat, Australia, 13.6 kHz
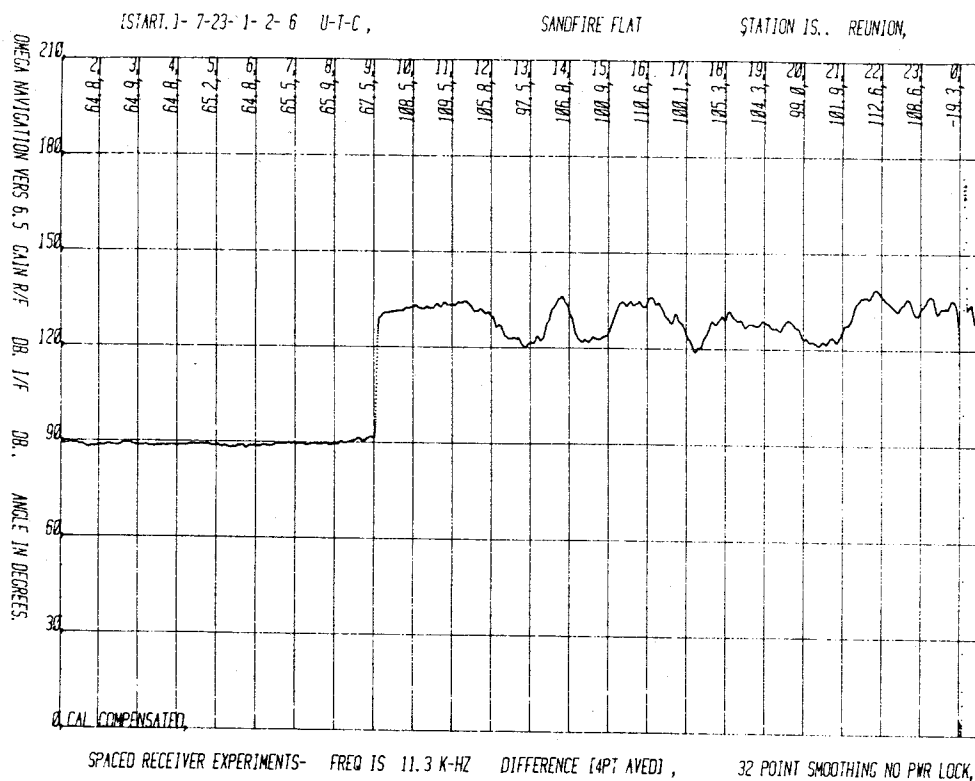
Figure 63. Sandfire Flat, Japan, 11-1/3 kHz

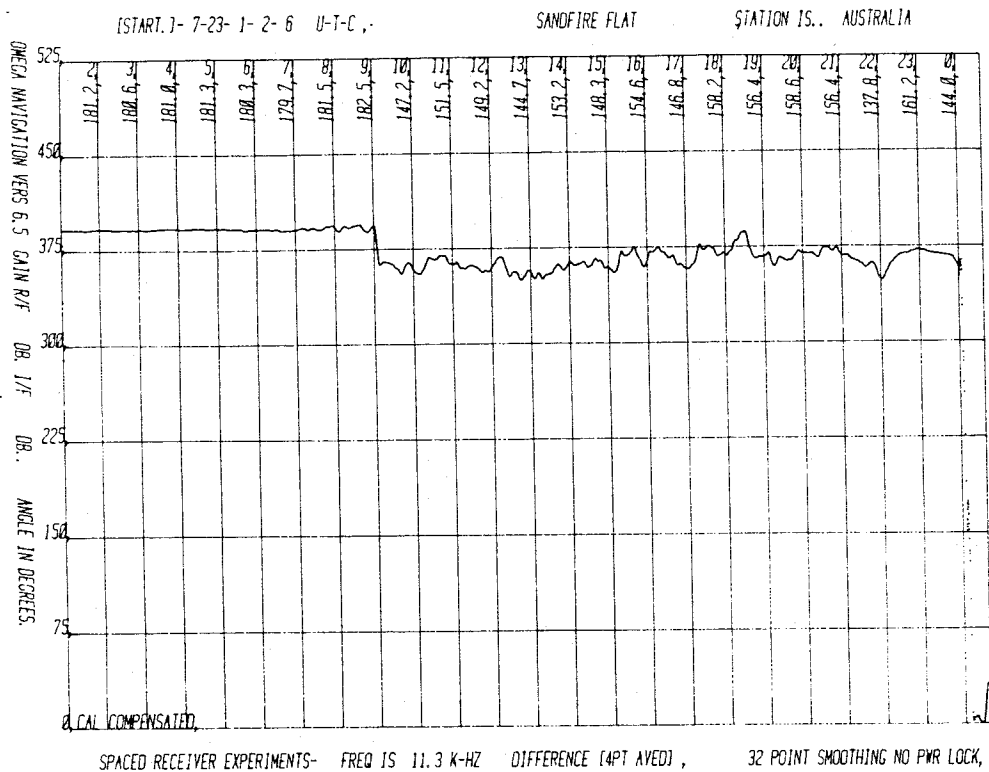Figure 64. Sandfire Flat, Reunion, 11-1/3 kHz

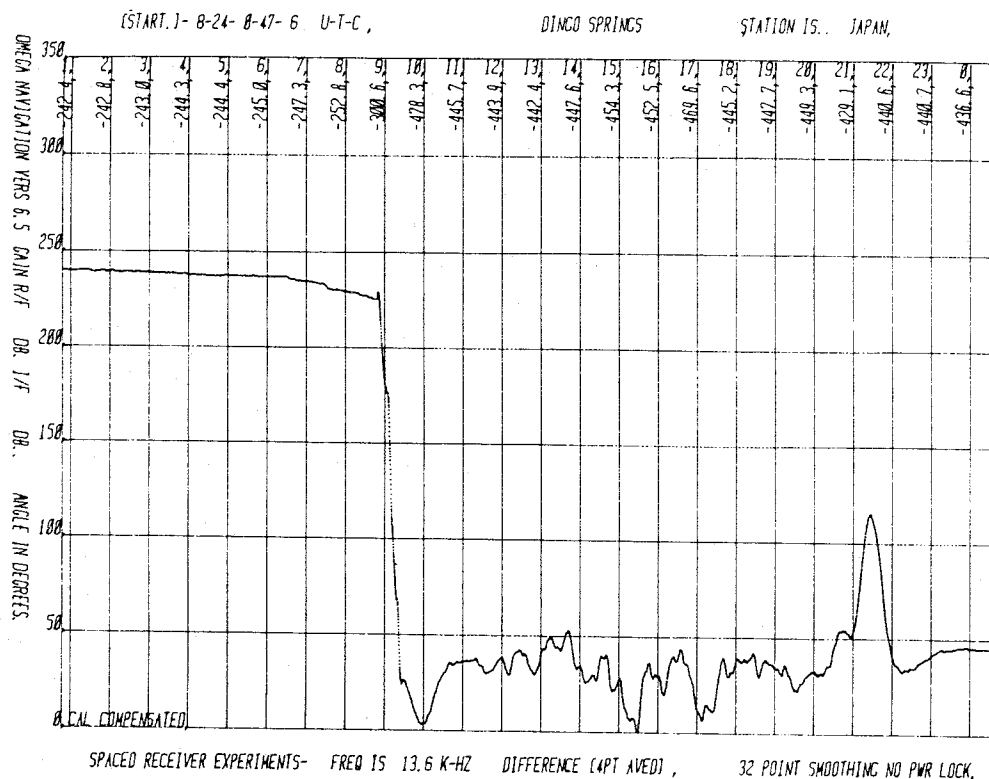Figure 65. Sandfire Flat, Australia, 11-1/3 kHz

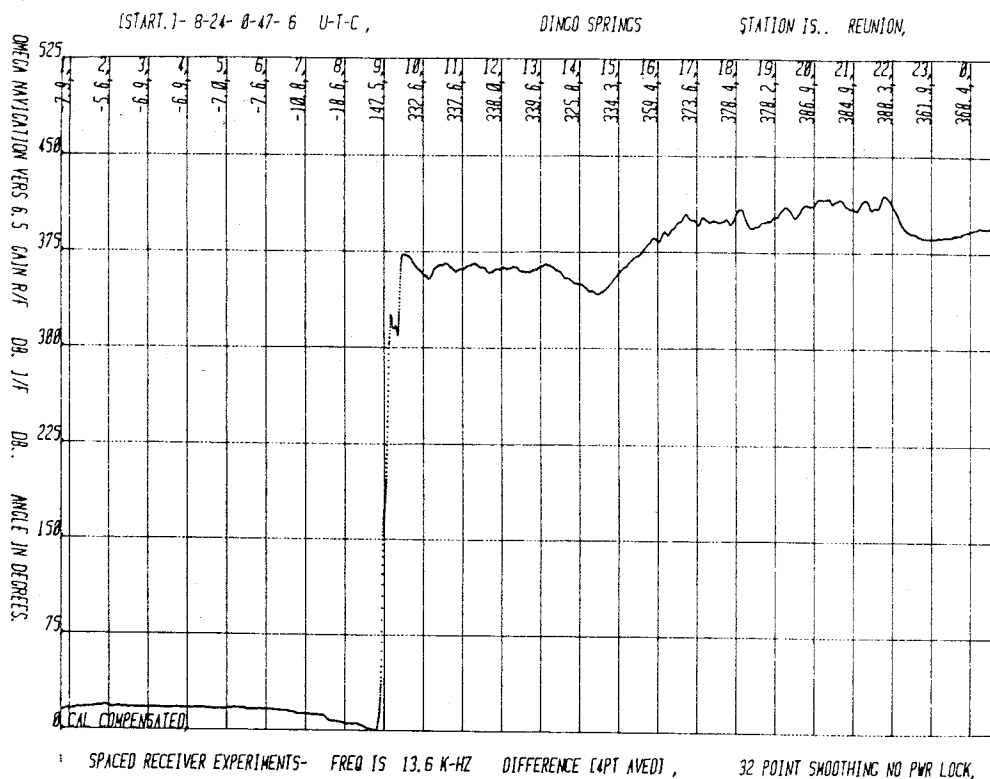Figure 66. Dingo Springs, Japan, 13.6 kHz

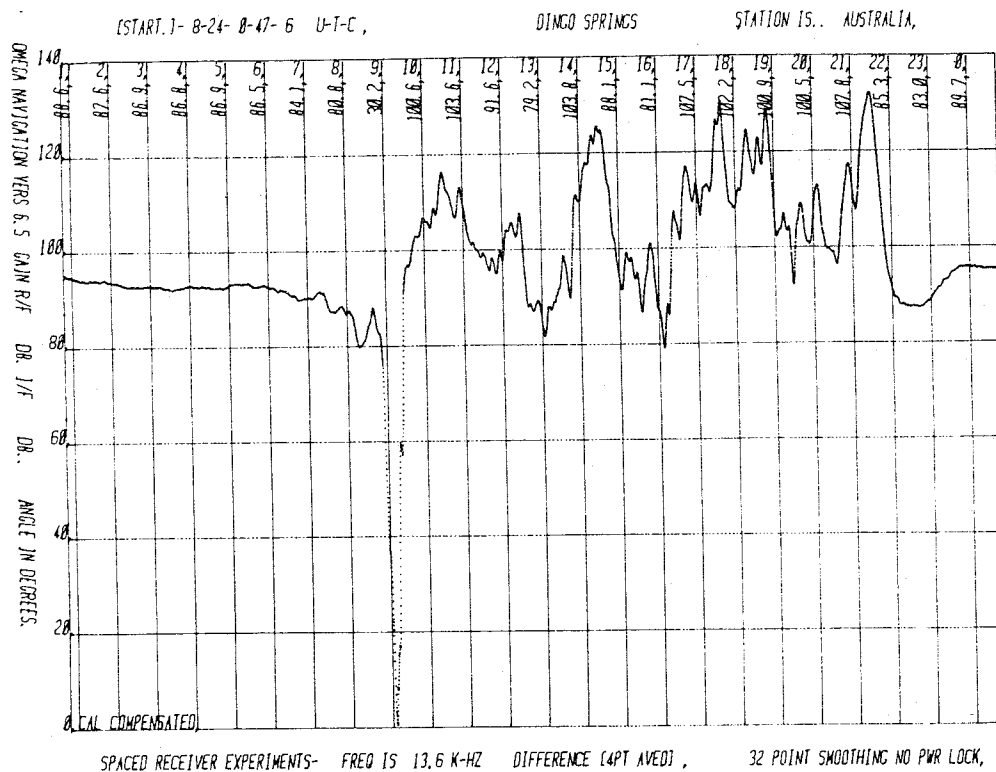Figure 67. Dingo Springs, Reunion, 13.6 kHz

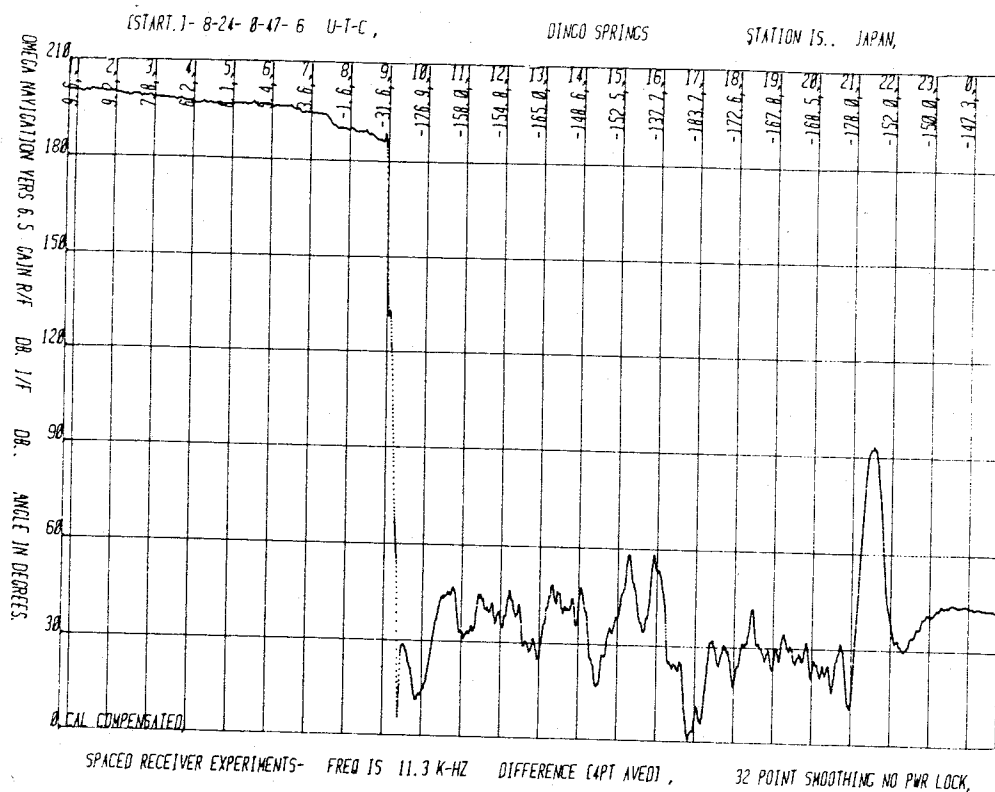Figure 68. Dingo Springs, Australia, 13.6 kHz

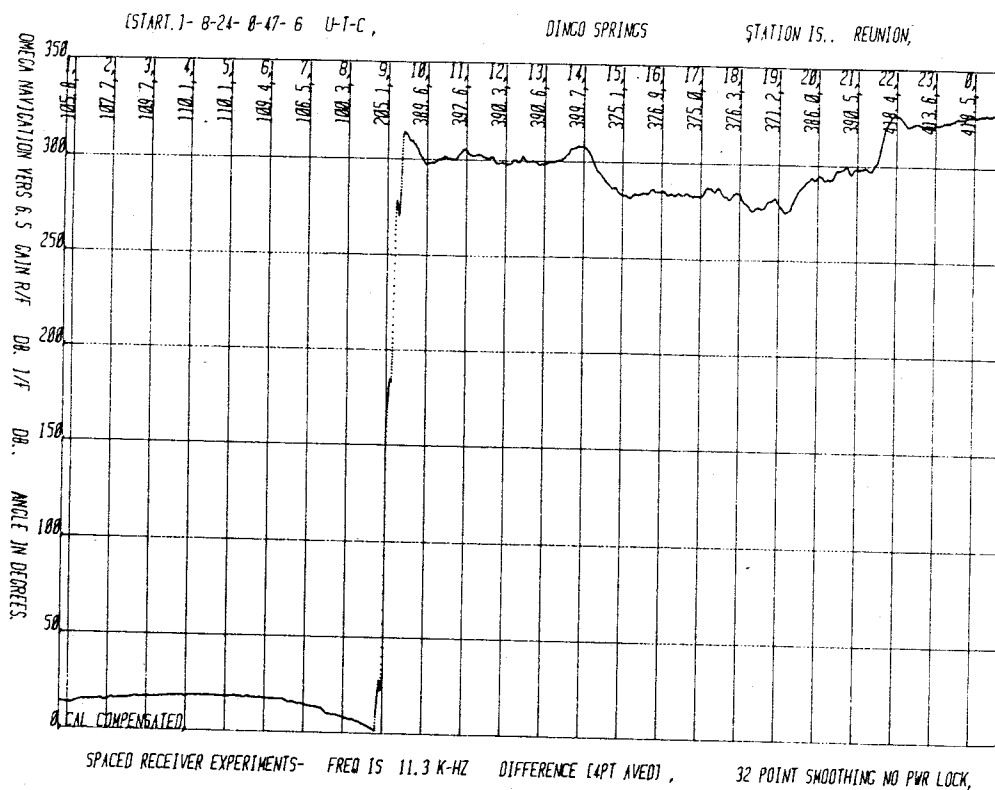Figure 69. Dingo Springs, Japan, 11-1/3 kHz

Figure 70. Dingo Springs, Reunion, 11-1/3 kHz
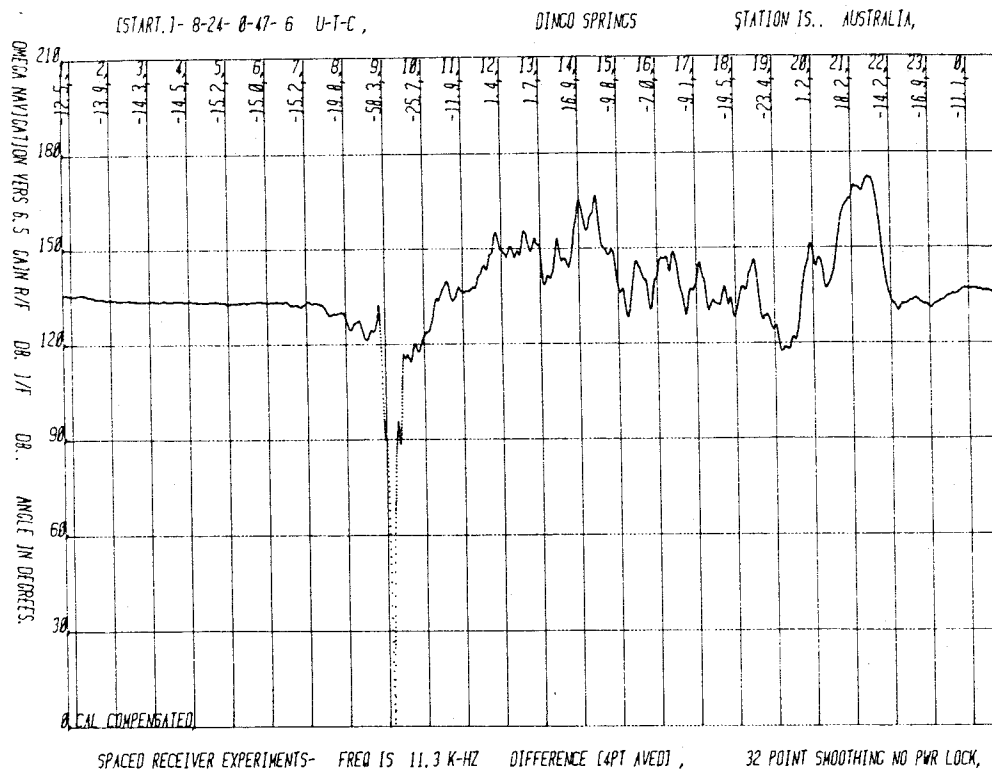
Figure 71. Dingo Springs, Australia, 11-1/3 kHz

DOCUMENT CONTROL DATA SHEET

Security classification of this page   UNCLASSIFIED

1	DOCUMENT NUMBERS	2	SECURITY CLASSIFICATION
AR Number: AR-004-303		a. Complete Document: Unclassified	
Series Number: ERL-0358-TM		b. Title in Isolation: Unclassified	
Other Numbers:		c. Summary in Isolation: Unclassified	

3	TITLE
LAND NAVIGATION IN THE KIMBERLEYS UTILISING DIFFERENTIAL OMEGA	

4	PERSONAL AUTHOR(S):	5	DOCUMENT DATE:
R.S. Edgar and J.H. Silby		February 1986	

6	6.1 TOTAL NUMBER OF PAGES
	6.2 NUMBER OF REFERENCES: 3

7	7.1 CORPORATE AUTHOR(S):	8	REFERENCE NUMBERS
Electronics Research Laboratory		a. Task: DST 84/077	
7.2 DOCUMENT SERIES AND NUMBER Electronics Research Laboratory 0358-TM		b. Sponsoring Agency: DSTO	

9	COST CODE:
	650805

10	IMPRINT (Publishing organisation)	11	COMPUTER PROGRAM(S) (Title(s) and language(s))
Defence Research Centre Salisbury			

12	RELEASE LIMITATIONS (of the document):
Approved for Public Release.	

Security classification of this page: UNCLASSIFIED

| 13 | ANNOUNCEMENT LIMITATIONS (of the information on these pages): |

No limitation

| 14 | DESCRIPTORS: | | 15 | COSATI CODES: |

a. EJC Thesaurus
   Terms

Navigation
Omega navigation

17070

b. Non-Thesaurus
   Terms

Land navigation
Differential omega
VLF navigation

| 16 | SUMMARY OR ABSTRACT:

(if this is security classified, the announcement of this report will be similarly classified)

Field trials were carried out in July/August 1985 to test the efficacy of Differential Omega for land navigation in the East and West Kimberley regions of Western Australia. To this end a base station was set up in Broome and movements undertaken between a local survey mark and similar marks at ranges of up to 700 km. This Technical Memorandum describes the nature of the exercise and discusses the results obtained.